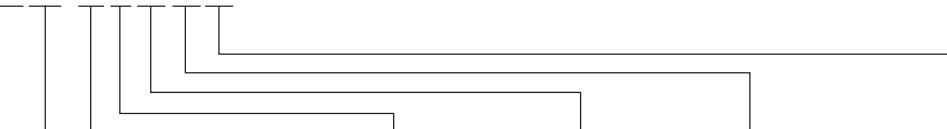


GOT2000 Overview

GT2715-X T B A S

		Code	Screen Size	Code	Resolution	Code	Display Type	Code	Frame Color	Code	Power Supply	Code	Communication Interface
15	15"	WX	WXGA	T	TFT Color	B	Black	A	100-240VAC	None (*)	Ethernet, RS-422/485, or RS-232, depending on model		
12	12.1"	X	XGA	M	TFT monochrome	W	White	D	24VDC	S1 (*)	RS-232 and RS-422/485 interfaces, or RS-422 interface only		
12F	12.1" Open Frame	S	SVGA	V	VGA	S	Silver	L	5VDC	S2 (*)	Two RS-232 interfaces		
10	10.4" or 10.1"	P	320 x 128 dots	R	480 x 272 dots	N	No Frame	-GF (*)	CC-Link IE Field Network communication unit set				
10F	10.4" Open Frame	Q	320 x 240 dots	W	Wide screen WVGA 800 x 480 dots								
08	8.4"												
08F	8.4" Open Frame												
07	7.0"												
07T	7.0" Rugged												
05	5.7"												
04	4.3"												
03	3.8"												
<hr/>													
GT27	Advanced model with multi-touch gesture functions												
GT25	High performance, cost efficient, mid-range model (open frame available)												
GT21	Compact models with basic functions												

*1: GT21 only.

*2: For GT27/GT25 only

GOT2000 Series General Specifications

Model Number	GT27, GT25	GT25 (Rugged) (*8)		GT21		
Operating Ambient Temp. (*1)	0 to 55°C (*2)	-20 °C to 65 °C		0 to 55°C (horizontal installation), 0 to 50°C (vertical installation)		
Storage Ambient Temperature	-20°C to 60°C	-30 °C to 75 °C		-20°C to 60°C		
Operating Ambient Humidity	10 to 90%RH, no condensation			10 to 90%RH, no condensation (*2)		
Storage Ambient Humidity	10 to 90%RH, no condensation			10 to 90%RH, no condensation (*2)		
Vibration Resistance	Conforming to JIS B 3502 and IEC 61131-2	Under intermittent vibration	Frequency	Acceleration	Half Amplitude	
			5 to 8.4Hz	-	3.5mm GT25: 7.0mm	
		Under continuous vibration	8.4 to 150Hz	9.8m/s ² GT25 19.6 m/s ²	-	
			5 to 8.4Hz	-	1.75mm GT25: 7.0mm	
Shock Resistance	-		8.4 to 150Hz	4.9m/s ² GT25 19.6 m/s ²	-	
				IEC 60068-2-27 (392m/s ² (40G), 3 times in each X, Y, or Z direction)	-	
Operating Atmosphere (*6)	Compliant with JIS B 3502, IEC 61131-2 (147 m/s ² (15G), 3 times each in X, Y and Z directions)					
Operating Altitude (*3)	2000m (6562 ft) or less					
Installation Location	Inside control panel					
Overvoltage Category (*4)	II or less					
Pollution Degree (*5)	2 or less					
Cooling Method	Self-cooling					
Grounding	Grounding with a ground resistance of 100Ω or less. If impossible, connect the ground cable to the control panel.	Grounding with a ground resistance of 100 Ω or less by using a ground cable that has a cross-sectional area of 2 mm ² or more. If impossible, connect the ground cable to the control panel.	Grounding with a ground resistance of 100Ω or less by using a ground cable that has a cross-sectional area of 0.14 to 1.5 mm ² (single wire), 0.14 to 1.0 mm ² (stranded wire), or 0.25 to 0.5 mm ² (rod terminal with an insulation sleeve). If impossible, connect the ground cable to the control panel. (*7)		Grounding with a ground resistance of 100Ω or less by using a ground cable that has a cross-sectional area of 0.14 to 1.5 mm ² (single wire), 0.14 to 1.0 mm ² (stranded wire), or 0.25 to 0.5 mm ² (rod terminal with an insulation sleeve). If impossible, connect the ground cable to the control panel. (*7)	

Notes:

- The operating ambient temperature includes the temperature inside the enclosure of the control panel to which the GOT is installed.
- (GT27, GT25) When any of the following units is mounted, the maximum operating ambient temperature must be 5 °C lower than the one described in the general specifications: multimedia unit (GT27-MMR-Z), MELSECNET/H communication unit (GT15-J71LP23-25, GT15-J71BR13), CC-Link communication unit (GT15-J61BT13)
 - (GT21) If the ambient temperature exceeds 40°C, the absolute humidity must not exceed 90% RH at 40 °C.
- Do not use or store the GOT under a pressure higher than the atmospheric pressure at altitude 0 m. Doing so may cause a malfunction. Air purging by applying pressure to the control panel may create clearance between the surface sheet and the touch panel. This may cause the touch panel to be not sensitive enough or the sheet to come off.
- This indicates the section of the power supply to which the equipment is assumed to be connected between the public electrical power distribution network and the machinery within the premises. Category II applies to equipment that is supplied with power from fixed facilities. The withstand surge voltage for the equipment with the rated voltage up to 300 V is 2500 V.
- This indicates the occurrence rate of conductive material in an environment where a device is used. Pollution degree 2 indicates an environment where only non-conductive pollution occurs normally and a temporary conductivity caused by condensation shall be expected depending on the conditions.
- (GT25, GT27 only) Some models have ANSI/ISA 12.12.01 approval for use in Class I, Division 2 (ANSI/ISA 12.12.01, C22.2 No.213-M1987) hazardous locations. For the details, please contact your local sales office.
- 5 VDC type does not require grounding.
- Communication units and options usable with the rugged model can be used in the environment described in the general specifications of the rugged model. For using peripheral devices to be connected to the GOT, refer to the manual of each device.


GT27 Series

GT27 Base Units

Category	Model Number	Screen Size	Resolution	Display Type	Frame Color	Power Supply	Stocked Item
GT2715	GT2715-XTBA	15"	XGA (1024 x 768)		Black	100-240VAC	S
	GT2715-XTBD					24VDC	S
GT2712	GT2712-STBA	12.1"	SVGA (800 x 600)		Black	100-240VAC	S
	GT2712-STBD					24VDC	S
GT2712	GT2712-STWA	12.1"	SVGA (800 x 600)		White	100-240VAC	S
	GT2712-STWD					24VDC	S
GT2710	GT2710-STBA	10.4"	SVGA (800 x 600)		Black	100-240VAC	S
	GT2710-STBD					24VDC	S
GT2710	GT2710-VTBA	10.4"	VGA (640 x 480)		Black	100-240VAC	S
	GT2710-VTBD					24VDC	S
GT2710	GT2710-VTWA	10.4"	VGA (640 x 480)		White	100-240VAC	S
	GT2710-VTWD					24VDC	S
GT2708	GT2708-STBA	8.4"	SVGA (800 x 600)		Black	100-240VAC	S
	GT2708-STBD					24VDC	S
GT2708	GT2708-VTBA	8.4"	VGA (640 x 480)		Black	100-240VAC	S
	GT2708-VTBD					24VDC	S
GT2705	GT2705-VTBD	5.7"	VGA (640 x 480)			24VDC	S

GT27 Power Supply Specifications

Model Number	GT2715-XTBA	GT2712-STBA	GT2710-STBA	GT2708-STBA	GT2715-XTBD	GT2712-STBD	GT2710-STBD	GT2708-STBD	GT2705-VTBD										
Input Power Supply Voltage	100 to 240VAC (+107.07%, -15%)				24VDC (+25%, -20%)														
Input Power Supply Frequency	50/60Hz ±5%				-														
Power Consumption	Maximum Load	51W or less	44W or less	41W or less	41W or less	48W or less	45W or less	42W or less	39W or less	30W or less									
	Stand Alone	25W	19W	17W	15W	23W	15W	15W	13W	7W									
	Stand Alone w/ Backlight Off	10W	10W	10W	10W	8W	8W	8W	8W	5W									
Inrush Current	40A or less (3ms, ambient temperature 25°C, maximum load)	60A or less (2ms, ambient temperature 25°C, maximum load)				5A or less (20ms, ambient temperature 25°C, maximum load)				69A or less (1 ms, ambient temperature: 25°C, under the maximum load)									
Permissible Instantaneous Failure Time	Within 20ms (100VAC or more)				Within 10ms														
Noise Resistance	Noise voltage 1500Vp-p, noise width 1μs by noise simulator with noise frequency 25 to 60Hz				Noise voltage 500Vp-p, noise width 1μs by noise simulator with noise frequency 25 to 60Hz														
Withstand Voltage	1500VAC for 1 minute between power supply terminal and ground				350VAC for 1 minute between power supply terminal and ground														
Insulation Resistance	10MΩ or higher with an insulation resistance tester (500VDC between power supply terminal and ground)																		
Applicable Wire Size	0.75 to 2 [mm²]																		
Clamp Terminal	Clamp terminals for M3 screw RAV1.25-3, V2-S3.3, V2-N3A, FV2-N3A																		
Tightening Torque (Terminal Block's Terminal Screws)	0.5 to 0.8 [N·m]																		



Screen Size	Model	A	B	Remarks
15"	GT2715	383.5 (15.10)	282.5 (11.12)	Same dimensions as GT1695, GT1595
12.1"	GT2712	302 (11.89)	228 (8.98)	Same dimensions as GT1685, GT1585, A985GOT
10.4"	GT2710	289 (11.38)	200 (7.87)	Same dimensions as GT167_M, GT157_M, A97_MGOT
8.4"	GT2708	227 (8.94)	176 (6.93)	Same dimensions as GT1665, GT1565
5.7"	GT2705	153 (6.02)	121 (4.76)	Same dimensions as GT1655, GT155_, GT145_, GT115_, GT105_, F940GOT

GT27 Performance Specifications

Model Number		GT2715-XTBA GT2715-XTBD	GT2712-STBA GT2712-STBD	GT2712-STWA GT2712-STWD	GT2710-STBA GT2710-STBD	GT2710-VTBA GT2710-VTBD	GT2710-VTWA GT2710-VTWD	GT2708-STBA GT2708-STBD	GT2708-VTBA GT2708-VTBD	GT2705-VTBD													
Display Section (*1, *2)	Type	TFT color LCD																					
	Screen Size	15"	12.1"	10.4"				8.4"		5.7"													
	Resolution (Dots)	1024 x 768 XGA	800 x 600 SVGA			640 x 480 VGA		800 x 600 SVGA	640 x 480 VGA														
	Display Size (W x H) mm	304.1 x 228.1	246.0 x 184.5		211.2 x 158.4			170.9 x 128.2		115.2 x 86.4													
	Number of Characters	16-dot standard font: 64 chars. x 48 lines (2-byte) 12-dot standard font: 85 chars. x 64 lines (2-byte)	16-dot standard font: 50 chars. x 37 lines (2-byte) 12-dot standard font: 66 chars. x 50 lines (2-byte)			16-dot standard font: 40 chars. x 30 lines (2-byte) 12-dot standard font: 53 chars. x 40 lines (2-byte)	16-dot standard font: 50 chars. x 37 lines (2-byte) 12-dot standard font: 66 chars. x 50 lines (2-byte)	16-dot standard font: 40 chars. x 30 lines (2-byte) 12-dot standard font: 53 chars. x 40 lines (2-byte)															
	Display Colors	65536 colors																					
	Intensity Adjustment	32-level adjustment																					
Backlight	Type	LED (not replaceable)																					
	Life	Approx. 60000 hours or more (Time for display intensity reaches 50% at ambient temperature of 25°C) (*4)																					
Touch Panel (*3)	Type	Analog resistive film																					
	Key Size (Dots)	Minimum 2 x 2 dots (per key) (*7)																					
	Simultaneous Press	Maximum 2 points																					
	Life	1 million times or more (operating force 0.98N or less)																					
Panel Color	Black	White	Black	White	Black																		
Human Sensor	Detection Distance (m)	1m			-																		
	Detection Temperature	Temperature difference between human body and ambient air: 4°C or higher			-																		
Memory	User Memory Capacity	Memory for storage (ROM): 57MB, Memory for operation (RAM): 128MB								Memory for storage (ROM): 32MB, Memory for operation (RAM): 80MB													
	Life (No. of Writings)	100000 times																					
Internal Clock Accuracy	±90 sec/month (ambient temperature 25°C)																						
Battery	Type	GT11-50BAT lithium battery																					
	Life	Approx. 5 years (ambient temperature 25°C)																					
Built-in Interface	RS-232	1ch Transmission speed: 115200/57600/38400/19200/9600/4800bps Connector shape: D-sub 9-pin (male)																					
	RS-422/485	1ch Transmission speed: 115200/57600/38400/19200/9600/4800bps Connector shape: D-sub 9-pin (female)																					
	Ethernet	1ch Data transfer method: 10BASE-T/100BASE-TX Connector shape: RJ-45 (modular jack)																					
	USB (Host)	2ch (front face/rear face)	1ch (rear face)	2ch (front face/rear face)	1ch (rear face)	2ch (front face/rear face)																	
		Maximum transfer speed: High-Speed 480Mbps Connector shape: USB-A																					
	USB (Device)	1ch (front face)	1ch (rear face)	1ch (front face)	1ch (rear face)	1ch (front face)																	
		Maximum transfer speed: High-Speed 480Mbps Connector shape: USB Mini-B																					
	SD Card	1ch SDHC compliant (maximum 32GB)																					
	Extension Interface (*6)	For communication unit(option unit) mounting																					
	Auxiliary Extension I/F	For option unit mounting																					
	Side Interface	For communication unit mounting																					
Buzzer Output	Single tone (tone, tone length adjustable)																						
Power LED	Emission color: 2 colors (blue, orange)																						
Protective Construction	Front: IP67F (*5,*8) In control panel: IP2X																						
External Dimensions (W x H x D) mm	397 x 300 x 60	316 x 246 x 52	303 x 218 x 52			241 x 194 x 52		167 x 139 x 60															
Panel Cutout (W x H) mm	383.5 x 282.5	302 x 228	289 x 200			227 x 176		153 x 121															
Weight (kg)	4.5	2.4	2.1			1.5		1.0															
Excludes Mounting Brackets																							
Applicable Software Package	GT Works3 Version1.112S or later	GT Works3 Version1.100E or later								GT Works3 Version1.130L or later													

Notes:

- As a characteristic of liquid crystal display panels, bright dots (always lit) and dark dots (never lit) may appear on the panel. Since liquid crystal display panels comprise a great number of display elements, the appearance of bright and dark dots cannot be reduced to zero. Individual differences in liquid crystal display panels may cause differences in color, uneven brightness and flickering. Note that these phenomena are characteristics of liquid crystal display panels and it does not mean the products are defective or damaged.
- Flickering may occur due to vibration, shock, or the display colors.
- When a stylus is used, the touch panel has a life of 100 thousand touches. The stylus must satisfy the following specifications: • Material: polyacetal resin • Tip radius: 0.8 mm or more
- To prevent the display section from burning in and lengthen the backlight life, enable the screen save function and turn off the backlight.
- To conform to IP67F, close the USB environmental protection cover by pushing the [PUSH] mark firmly. (To conform to IP2X, open the USB environmental protection cover.) Note that the structure does not guarantee protection in all users' environments. The GOT may not be used in certain environments where it is subjected to splashing oil or chemicals for a long period of time or soaked in oil mist.
- When using a GT2705 with multiple devices such as extension units, a barcode reader, and an RFID controller, the total amount of current must be within the maximum amount of current supplied by the GT2705. For the details, please refer to an appropriate GOT2000 Series manual.
- The minimum size of a key that can be arranged. To ensure safe use of the product, the following settings are recommended. • Key size: 16 x 16 dots or larger • Distance between keys: 16 dots or more
- The suffix "F" of IP67F is a symbol that indicates protection rate against oil. It is described in the Appendix of Japanese Industrial Standard JIS C 0920.