

The 400XR Series


Screw Driven Positioners for Precision,
High Force Applications

- Pre-engineered package
- Performance matched components
- Environmental protection
- Laser certified precision



Typical Enhancements

- Limit/home position sensors
- Linear encoder feedback
- Cleanroom preparation
- Multi-axis brackets & adapters
- Numerous selectable motor mounts
- Servo motors and drives
- Programmable controls
- Cable management system

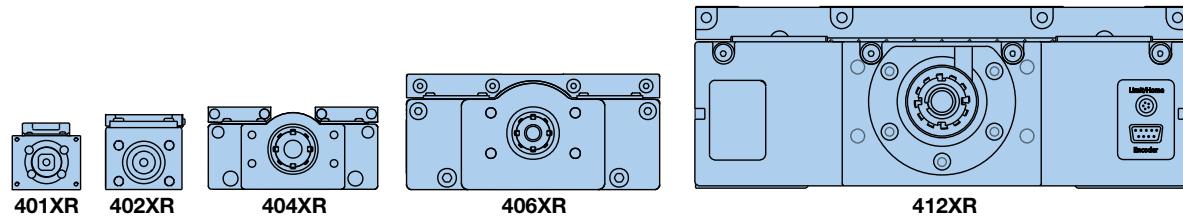


	401XR	402XR	404XR	406XR	412XR
Maximum Travel (mm)	300	600	600	2000	2000
Maximum Payload (N)	50	100	170	630	1470
Maximum Acceleration (m/sec ²)	20	20	20	20	20

The **400XR** precision linear positioner family has achieved global recognition for consistent accuracy, reliable performance, high strength, and unmatched versatility. The XRs have excelled in industries such as life sciences, fiber optics and instrumentation, where the highest degree of precision is required.

And yet, because of the rugged construction, strength, and sealed design, these units have been used extensively for industrial automation applications such as packaging, automotive, and more.

The XR family offers an unrivaled array of features and options which are easily matched to fit

any application, from the very basic to the highly complex. Premier performance, modular compatibility, and quick delivery have made these tables the perfect building blocks for precision multi-axis systems.

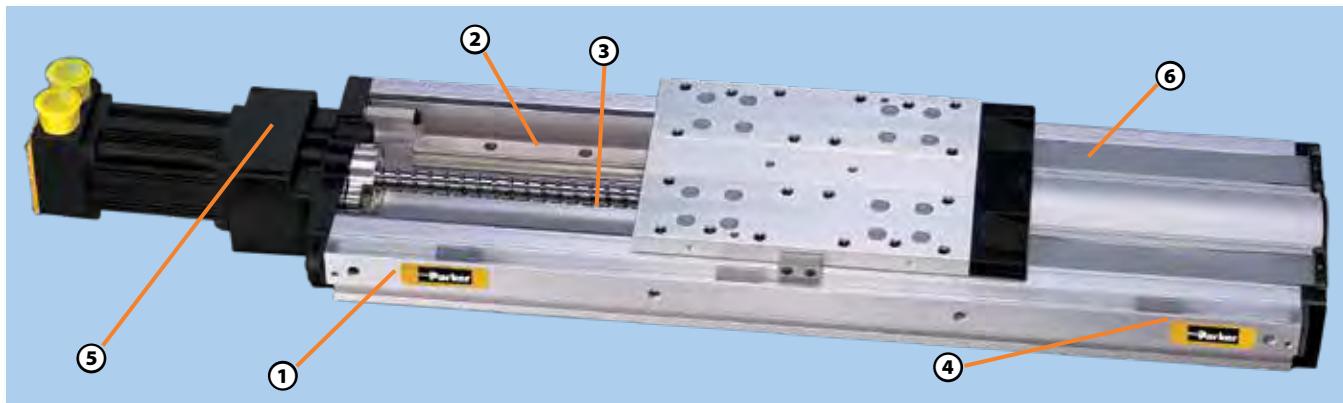

① High Strength Aluminum Body

Extruded aluminum housing is precision machined to provide outstanding straightness and flatness.

② Square Rail Linear Bearing

These tables are equipped with square rail carriage support bearings which provide high load carrying capabilities, smooth precise motion and dependable performance.

③ High Efficiency Ballscrew Drive

Precision ground, or rolled ballscrew drive (5, 10, 20, 25, 32 mm lead) offers high throughput, efficiency, accuracy and repeatability.

④ Limit/Home Sensors

Proximity sensors establish "end of travel" and "home" location and are easily adjustable over entire length to restrict the travel envelope.

⑤ Motor Mounts

A large selection of servo and stepper motor sizes plus selectable mounting configurations (in-line, parallel) permit **hundreds** of motor mounting possibilities.

⑥ IP30 Rated Strip Seals

An anodized aluminum cover combined with stainless steel strip seals provide IP30 protection to interior components and enhance the overall appearance.

Encoders


The linear encoder option offers direct positional feedback of the carriage location. The rotary shaft encoder couples directly to the drive shaft to nullify any incurred mechanical error (particularly useful with the parallel motor mount). Not shown.

Shaft Brake

The electromagnetic shaft brake option couples directly to the drive screw and is employed primarily on vertical axes to halt carriage motion during a power loss. Not shown.

Convenient Mounting Slots

Continuous T-slots along the side of the table body provide a convenient means of mounting the table to a work surface as well as mounting accessories to the table.

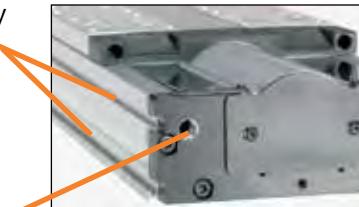

Positive Pressure Port

A standard port (1/8 NPT) for pressurizing the interior to prevent particle intrusion. (Standard on 404XR, 406XR, 412XR units.)

Easy Lube System

A standard option on some models, enables easy access for ballscrew and bearing lubrication.



Cleanroom Preparation

Class 10 cleanroom preparation is a standard option for the 400XR series. For detailed technical information on cleanroom preparation, contact Parker's Application Engineering Department at **1.800.245.6903**



SPECIFICATIONS

401XR (41 mm wide profile)

402XR Series (58 mm wide profile)

The 401XR and 402XR Series positioners enhance the 400XR family of precision linear positioners, addressing applications which involve precise positioning of smaller payloads within a very small space envelope.

These ballscrew driven positioners were developed to address the needs of industries such as photonics,

life sciences, semiconductor, and instrumentation, where technology advancements dictate miniaturization of work envelopes.



Common Specifications

	Precision*		Standard	
	401XR	402XR	401XR	402XR
Bidirectional Repeatability				
2 mm lead	±1.3	–	±5	–
5 or 10 mm lead	±1.3	±1.3	±12	±12
Duty Cycle	100	100	100	100
Maximum Acceleration	m/sec ² (in/sec ²)	20 (773)	20 (773)	20 (773) 20 (773)
Normal Load Capacity⁽¹⁾	kgf (lbs)	50 (110)	100 (220)	50 (110) 100 (220)
Axial Load Capacity⁽¹⁾	kgf (lbs)	5.5 (12.1) 15.5 (34.2)	– 38 (84)	5.5 (12.1) 15.5 (34.2)
2 mm lead	5.5 (12.1)	–	5.5 (12.1)	–
5 or 10 mm lead	15.5 (34.2)	38 (84)	15.5 (34.2)	38 (84)
Drive Screw Efficiency	%	80	80	80
Maximum Breakaway Torque	Nm (in-oz)	0.03 (4.2)	0.086 (12.0)	0.03 (4.2) 0.086 (12.0)
Maximum Running Torque⁽²⁾	Nm (in-oz)	0.028 (4.0)	0.08 (11.3)	0.028 (4.0) 0.08 (11.3)
Linear Bearing Coefficient of Friction		0.01	0.01	0.01
Ballscrew Diameter				
2 mm lead	mm	6	–	6
5 or 10 mm lead		8	12	8
Carriage Weight	kg (lbs)	0.045 (0.1)	0.11 (0.25)	0.045 (0.1) 0.11 (0.25)

* Requires linear encoder option E3 or E4. (1) Refer to life load charts found later in this section. (2) Ratings established at 2 rps.

Travel/Screw Lead Dependent Specifications

Travel (mm)	Positional Accuracy* (μm)				Straightness & Flatness		Input Inertia (10 ⁻⁵ kg·m ²)				Maximum Screw Speed (revs/sec)		Unit Weight (kg)			
	401XR		402XR		401XR		402XR		401XR		402XR		401XR		402XR	
	Precision	Standard	Precision	Standard	401XR	402XR	2 mm	10 mm	5 mm	10 mm	401XR	402XR	401XR	402XR	401XR	402XR
50	10	20	–	–	20	–	0.6	–	–	–	100	–	1.0	–	1.0	–
100	10	20	10	20	20	20	0.9	–	12.0	–	100	90	1.2	2.3	1.2	2.3
150	12	20	12	20	20	20	1.1	–	15.0	–	100	90	1.3	2.6	1.3	2.6
200	16	30	16	30	25	25	–	4.7	20.0	–	100	90	1.5	2.8	1.5	2.8
300	18	40	18	40	25	25	–	5.2	–	25.0	100	90	1.7	3.2	1.7	3.2
400	–	–	21	40	–	30	–	–	–	29.0	–	95	–	3.8	–	3.8
600	–	–	25	50	–	30	–	–	–	39.0	–	50	–	4.8	–	4.8

*Consult factory for higher accuracy capabilities via slope correction or stage mapping via laser interferometry.

404XR Series (95 mm wide profile)

The 404XR is a sleek compact positioner (47.3 x 95 mm profile) capable of carrying 170 kg loads up to a distance of 600 mm. Its quick and accurate positioning capability can be attributed to a high strength extruded housing, square rail ball bearing system, and precision ground ballscrew drive.

With its low profile design the 404XR is ideal for height restricted applications, and its lightweight construction makes it well suited as secondary axes on multi-axis systems. These units offer a wide array of easily adapted options and accessories which permit easy configuration to specific requirements.



Common Specifications

		Precision	Standard
Bidirectional Repeatability⁽⁵⁾		µm	±1.3 — ±3 ±12
Ballscrew			
Leadscrew			
Duty Cycle		%	100 — 100 75
Ballscrew			
Leadscrew			
Maximum Acceleration	m/sec ² (in/sec ²)	20 (773)	20 (773)
Normal Load Capacity⁽¹⁾	kgf (lbs)	170 (375)	170 (375)
Axial Load Capacity⁽²⁾			
Ballscrew			
Leadscrew			
Drive Screw Efficiency	%		
Ballscrew - Inline Motor Mount		90	90
Ballscrew - Parallel Motor Wrap		N/A	81
Leadscrew - Inline Motor Mount		30	30
Leadscrew - Parallel Motor Wrap		N/A	27
Maximum Breakaway Torque	Nm (in-oz)	0.13 (18)	0.18 (26)
Maximum Running Torque⁽³⁾	Nm (in-oz)	0.11 (16)	0.17 (24)
Linear Bearing Coefficient of Friction		0.01	0.01
Screw Diameter			
Ballscrew			
Leadscrew			
Carriage Weight	kg (lbs)	0.70 (1.55)	0.70 (1.55)



Parallel Motor Mount
(with limit/home sensor pack option)

(1) Refer to life load charts found later in this section.

(2) Axial load for parallel mount is limited by a maximum input torque of 2.5 Nm.

(3) Ratings established at 2 rps.

(4) Consult factory for higher accuracy capabilities via slope correction or stage mapping via laser interferometry.

(5) Consult factory for specifications with linear encoder.

(6) Consult factory for higher screw speeds.

(7) Leadscrew is available only in custom builds.

Travel/Screw Lead Dependent Specifications

Travel (mm)	Positional Accuracy ^{(4) (5)} (µm)		Straightness & Flatness		Input Inertia (10 ⁻⁵ kg·m ²)			Max Screw Speed ⁽⁶⁾ (revs/sec)		Unit Weight (kg)		
	Ballscrew		Leadscrew ⁽⁷⁾		Ballscrew	Leadscrew ⁽⁷⁾	5 mm	10 mm	20 mm	Ballscrew	Leadscrew ⁽⁷⁾	
	Precision	Standard										
50	8	12	20	6	8		1.68	1.81	2.34	60	25	2.8
100	8	12	20	6	8		1.93	2.07	2.60	60	25	3.0
150	10	14	30	9	12		2.19	2.32	2.85	60	25	3.3
200	12	20	40	10	16		2.44	2.57	3.11	60	25	3.6
250	12	22	50	12	16		2.69	2.83	3.36	60	25	3.9
300	14	24	60	13	18		2.95	3.08	3.61	60	25	4.2
350	14	26	70	15	23		3.20	3.33	3.87	60	25	4.5
400	16	26	80	16	27		3.46	3.59	4.12	60	25	4.8
450	19	28	90	18	30		3.71	3.84	4.37	60	25	5.1
500	21	34	100	19	30		3.96	4.10	4.63	60	20	5.4
550	23	36	110	21	30		4.22	4.35	4.88	60	20	5.7
600	25	40	112	22	30		4.47	4.60	5.14	54	20	6.0

406XR Series (150 mm wide profile)

The 406XR can position high loads (up to 630 kgf) over distances up to two meters. Because of its size and strength (270 Nm, 200 lb-ft moment load capacity) this durable table is ideal as the base unit in a multi-axis system.

From high resolution to high throughput, selectable ballscrew leads (5, 10, 20, 25 mm) make the desired resolution/velocity ratio easy to achieve, and stainless steel seal strips alleviate environmental concerns.



Common Specifications

	Precision	Standard
Bidirectional Repeatability⁽⁵⁾	µm	±1.3
Duty Cycle	%	100
Maximum Acceleration	m/sec ² (in/sec ²)	20 (773)
Normal Load Capacity⁽¹⁾	kg (lbs)	630 (1390)
Axial Load Capacity⁽²⁾	kg (lbs)	90 (198)
0 to 600 mm Travel	–	90 (198)
700 to 2000 mm Travel	–	200 (440)
Drive Screw Efficiency	%	90
Maximum Breakaway Torque	Nm (in-oz)	0.13 (18)
0 to 600 mm Travel	–	0.18 (26)
700 to 2000 mm Travel	–	0.39 (55)
Maximum Running Torque⁽³⁾	Nm (in-oz)	0.11 (16)
0 to 600 mm Travel	–	0.17 (24)
700 to 2000 mm Travel	–	0.34 (48)
Linear Bearing Coefficient of Friction		0.01
Ballscrew Diameter	mm	16
0 to 600 mm Travel	–	16
700 to 2000 mm Travel	–	25
Carriage Weight	kg (lbs)	2.7 (5.94)
		2.7 (5.94)



(1) Refer to life load charts found later in this section.

(2) Axial load for parallel mount is limited to: 140 lbs for the 5, 10 and 20 mm lead drives: 104 kg (230 lbs) for 25 mm lead drives.

(3) Ratings established at 2 rps.

(4) Consult factory for higher accuracy capabilities via slope correction or stage mapping via laser interferometry.

(5) Consult factory for specifications with linear encoder.

(6) Consult factory for higher screw speeds.


Travel/Screw Lead Dependent Specifications

Travel (mm)	Positional Accuracy ⁽⁴⁾⁽⁵⁾ (µm)		Straightness & Flatness	Input Inertia (10 ⁻⁵ kg·m ²)				Max Screw Speed ⁽⁶⁾ (revs/sec)	Unit Weight (kg)
	Precision	Standard		5 mm	10 mm	20 mm	25 mm		
100	8	12	6	3.34	3.85	5.90	–	60	8.7
200	12	20	10	3.92	4.43	6.48	–	60	10.0
300	14	24	13	4.50	5.01	7.06	–	60	11.3
400	16	26	16	5.08	5.59	7.64	–	60	12.6
500	21	34	19	5.65	6.17	8.22	–	55	13.9
600	25	40	22	6.23	6.75	8.80	–	44	15.2
700	–	92	25	36.51	37.02	–	40.61	47	19.2
800	–	94	29	39.96	40.47	–	44.07	47	20.7
900	–	103	32	43.41	43.93	–	47.52	47	22.2
1000	–	105	35	46.87	47.38	–	50.97	47	23.7
1250	–	118	42	55.50	56.01	–	59.61	35	27.6
1500	–	134	50	64.14	64.65	–	68.24	26	31.4
1750	–	154	57	72.77	73.28	–	76.88	20	35.2
2000	–	159	65	81.40	81.92	–	85.51	16	39.1

412XR Series (285 mm wide profile)

The 412XR is a rugged heavy duty linear table (285 mm x 105 mm profile) that enables massive loads (up to 1470 kgf) to be precisely positioned over distances up to two meters. Single point "easy lube" port is standard on carriage assembly for simple servicing and a convenient adapter plate (#100-6784-01) is available for easy X-Y configuration.

An unrivaled array of options combined with mounting compatibility with the smaller 400XR tables makes the 412XR ideal as the base unit for multi-axis positioning of heavier payloads.

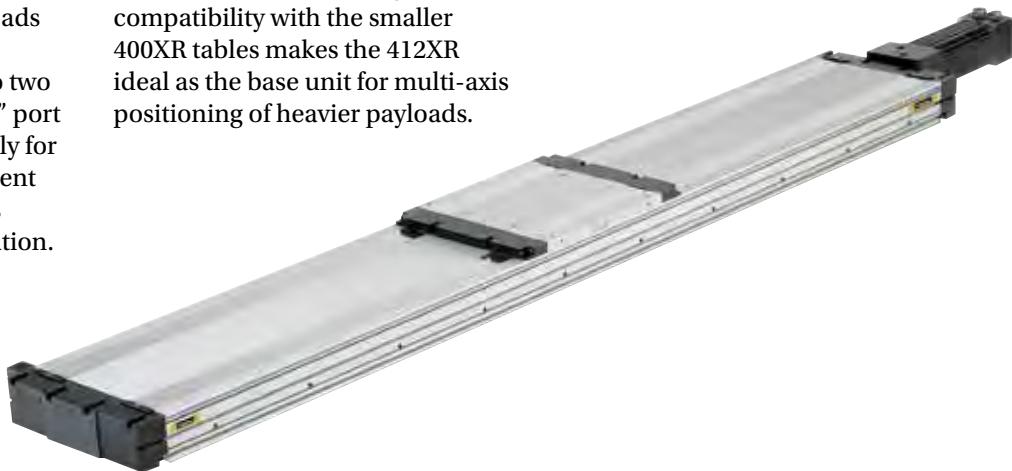

Common Specifications

Standard			
Screw Lead	mm	5, 10, 25	32
Bidirectional Repeatability ⁽⁴⁾	µm	±5	±5
Duty Cycle	%	100	100
Maximum Acceleration	m/sec ² (in/sec ²)	20 (773)	20 (773)
Normal Load Capacity ⁽¹⁾	kg (lbs)	1470 (3241)	1470 (3241)
Axial Load Capacity	kg (lbs)	200 (441)	460 (1014)
Drive Screw Efficiency	%	90	80
Maximum Breakaway Torque	Nm (in-oz)	0.61 (86)	0.76 (108)
Maximum Running Torque ⁽²⁾	Nm (in-oz)	0.55 (78)	0.69 (98)
Linear Bearing Coefficient of Friction		0.01	0.01
Ballscrew Diameter	mm	25	32
Carriage Weight	kg (lbs)	12 (27)	13 (28)

(1) Refer to life load charts found later in this section.

(2) Ratings established at 2 rps.

(3) Consult factory for higher accuracy capabilities via slope correction or stage mapping via laser interferometry.

(4) Consult factory for specifications with linear encoder.

(5) Consult factory for higher screw speeds.

Travel/Screw Lead Dependent Specifications

Travel (mm)	Positional Accuracy ^{(3) (4)} (µm)	Straightness & Flatness	Input Inertia (10 ⁻⁵ kg·m ²)				Max Screw Speed ⁽⁵⁾ (revs/sec)		Unit Weight (kg)	
			5 mm	10 mm	25 mm	32 mm	5, 10, 25 mm	32 mm	5, 10, 25 mm	32 mm
150	64	9	27.20	29.45	46.76	98.20	47	42	39.6	41.5
250	66	12	30.21	32.46	49.78	106.28	47	42	42.9	45.0
350	71	15	33.23	35.48	52.79	114.37	47	42	46.2	48.5
650	91	24	42.27	44.52	61.83	138.63	47	42	56.1	59.0
800	94	29	46.79	49.04	66.35	150.76	47	42	61.0	64.2
1000	105	35	52.81	55.06	72.37	166.94	45	42	67.6	71.2
1250	118	42	58.84	61.09	78.40	183.11	34	41	74.2	78.2
1500	134	50	67.87	70.12	87.44	207.38	24	31	84.1	88.7
1750	154	57	75.41	77.66	94.97	227.59	18	24	92.4	97.5
2000	159	65	82.94	85.19	102.50	247.81	15	19	100.6	106.2

400XR Series Life/Load

The following performance information is provided as a supplement to the product specifications pages. The following graphs are used to establish the table life relative to the applied loads.

The useful life of a linear table at full catalog specifications is dependent on the forces acting upon it. These forces include both static components

resulting from payload weight, and dynamic components due to acceleration/deceleration of the load. In multi-axes applications, the primary positioner at the bottom of the stack usually establishes the load limits for the combined axes. When determining life/load, it is critical to include the weight of all positioning elements that contribute to the load supported by the primary axis.


Catalog load specifications are rated for 100 million inches of travel or 2540 km.

For final evaluation of life vs load, including off center, tension, and side loads, refer to the charts and formulas found on our web site at www.parker.com/emn/400XR


Normal Load (Compression)

These graphs provide a "rough cut" evaluation of the support bearing life/load characteristics. The curves show the life/load relationship when the applied load is centered on the carriage, normal (perpendicular) to the carriage mounting surface.

Life with Compression Load

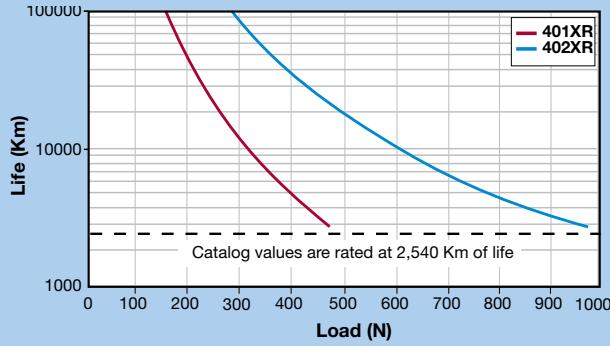


Life with Compression Load

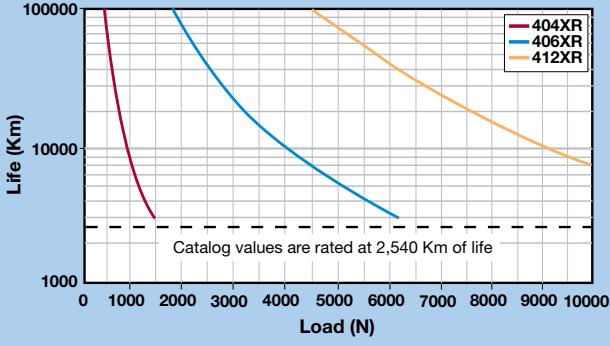


Axial Load (Thrust)

These graphs illustrate table ballscrew life relative to the axial load.


Thrust Load

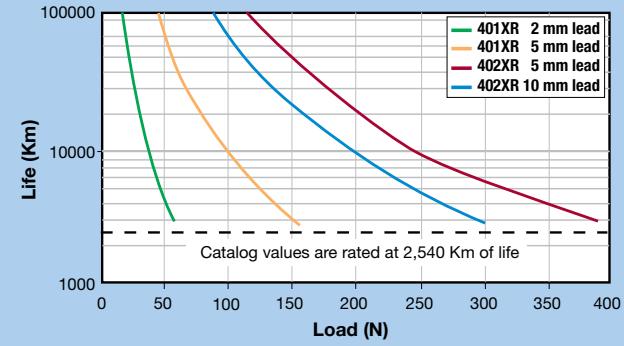

Thrust Load

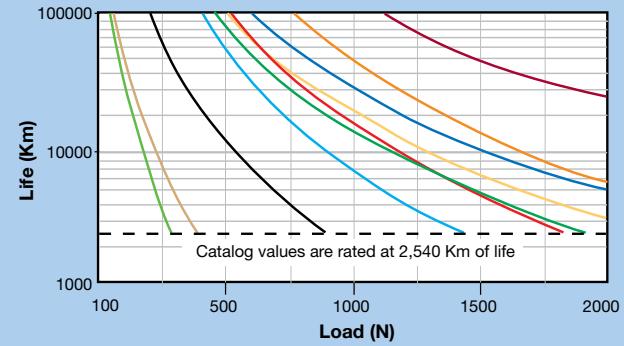

400XR Series Bearing Life/Load*

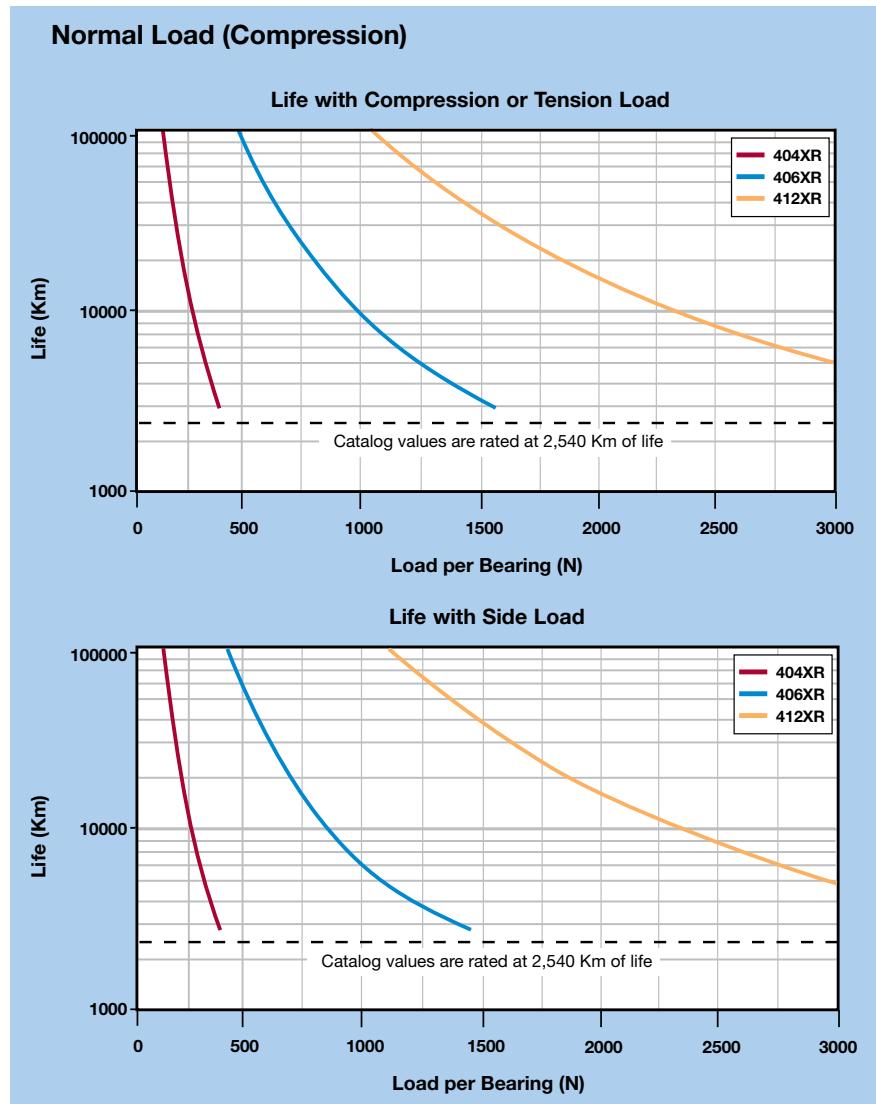

These charts are to be used in conjunction with the corresponding formulas found in the product manuals to establish the life/load for each bearing (4 per table).

Several dimensions, which are specific to each linear positioning table model, and the load geometry are required for these computations. These dimensions are supplied in the catalog information for each positioner. The dimensions are referenced as follows:

- d1** bearing block center-to-center longitudinal spacing
- d2** bearing rail center-to-center lateral spacing
- da** Rail center-to-carriage mounting surface

	d1	d2	da
404XR	80	57	28
406XR	114	90.3	42.5
412XR	205	192	43


Refer to Parker's website www.parker.com/emn/400XR for moment loading and other engineering data.

*For 401XR and 402XR moment loading capacities, please refer to the maintenance manual.

CONFIGURATIONS

400XR Multi-Axis Cartesian Robot Configurations

Parker's XR Series can be designed into multi-axis systems that are the ideal solution for cost effective automation in life sciences, semiconductor, electronics, automated assembly, dispensing, and many other applications.

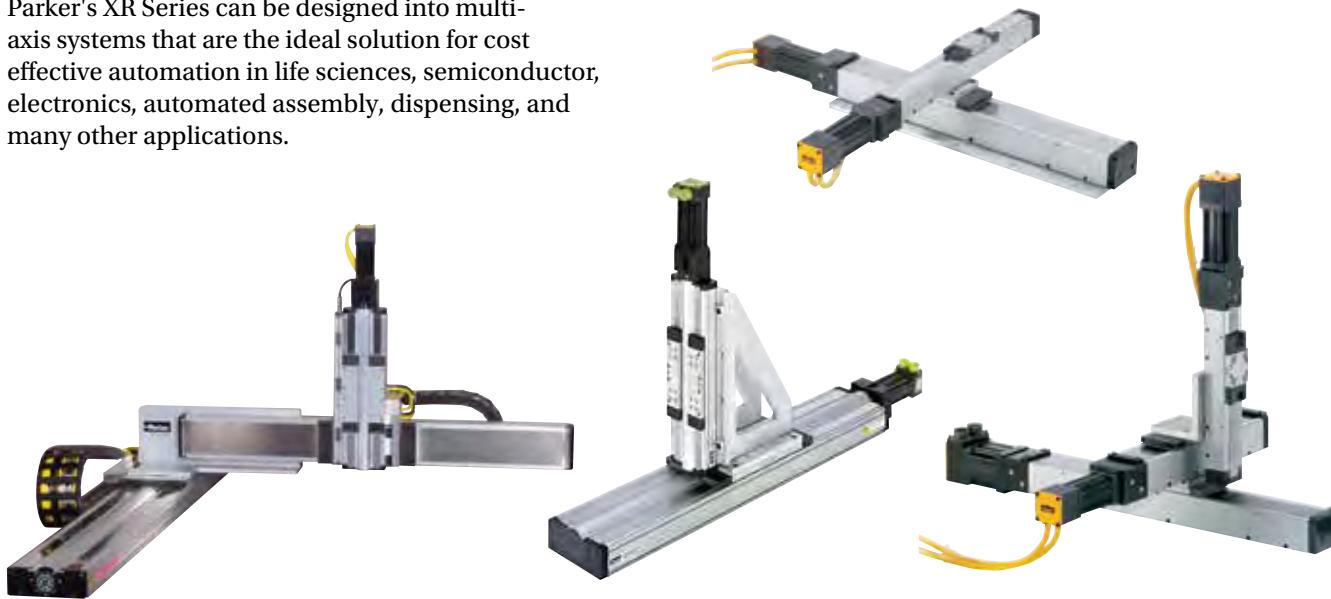

XR Mounting Plate Options

Second Axis (Y or Z)*

Base Axis (X) *	Orientation	401XR								412XR 412LXR	Wedge
		50 mm	>50 mm	402XR	404XR	404LXR	406XR	406LXR			
401XR	X-Y	002-2126-01	002-2065-01	—	—	—	—	—	—	—	
	X-Y Cartesian	002-2123-01	002-2068-01	—	—	—	—	—	—	—	
	X-Z	—	101-0955-01	—	—	—	—	—	—	—	
402XR	X-Z Side Mount	002-2123-01	101-0955-01	—	—	—	—	—	—	—	
	X-Y	002-2130-01	002-2066-01	002-2066-01	—	—	—	—	—	—	
	X-Y Cartesian	002-2069-01	002-2069-01	002-2069-01	—	—	—	—	—	—	
	X-Z	—	002-2069-01	002-2069-01	—	—	—	—	—	—	
404XR 404LXR	X-Z Side Mount	002-2125-01	002-2069-01	002-2069-01	—	—	—	—	—	—	
	X-Y	100-9193-01	100-9193-01	100-9193-01	Direct Mount*	100-9584-01	—	—	—	100-9274-01	
	X-Y Carriage to Carriage	—	—	—	100-3945-01	100-3945-01	—	—	—	—	
	X-Y Cartesian Right Hand	002-2162-02	002-2162-02	002-2162-02	—	—	—	—	—	—	
	X-Y Cartesian Left Hand	002-2162-02	002-2162-02	002-2162-02	—	—	—	—	—	—	
	X-Z	—	—	—	002-1840-01	—	—	—	—	—	
406XR 406LXR	X-Z Side Mount	—	—	—	002-1839-01	—	—	—	—	—	
	X-Y	100-9194-01	100-9194-01	100-9194-01	Direct Mount*	Direct Mount*	Direct Mount*	Direct Mount*	—	100-9274-01	
	X-Y Carriage to Carriage	—	—	—	100-4191-01	100-4191-01	100-4191-01	100-4191-01	—	—	
	X-Y Cartesian	—	—	—	002-2163-01	002-2163-01	—	—	—	—	
412XR 412LXR	X-Z	—	—	—	002-1823-01	—	002-1817-01	—	—	—	
	X-Z Side Mount	—	—	—	002-1824-01	—	002-1818-01	—	—	—	
	X-Y	—	—	—	Direct Mount* or Toe Clamp	100-6784-01	—				
ZP 200 Wedge	X-Y Cartesian	—	—	—	—	—	002-2164-01	002-2164-01	—	—	
	X-Y	—	—	—	100-9274-01	100-9274-01 or Toe Clamp	100-9274-01 or Toe Clamp	100-9274-01	—	—	

* An adapter plate (100-3945-01) is required whenever the X-axis is a parallel motor mount model.

If the Y-axis is 404XR with 50 mm stroke, a special plate or toe clamp option is required.

400XR Multi Axis Configurations

These diagrams show the most popular variations of multi-axis configurations. Both standard and custom brackets are available. Standard X-Y orientation will place the X axis motor at the 6 o'clock position and the Y axis motor at the 3 o'clock position.




Figure 1
Two Axis (X-Y) Horizontal Mounting

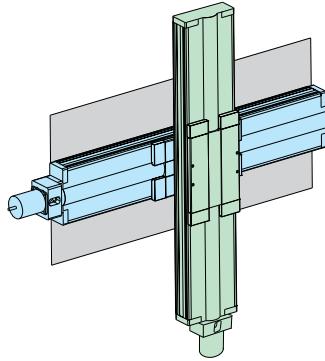


Figure 2
Two Axis (X-Z) Vertical Mounting

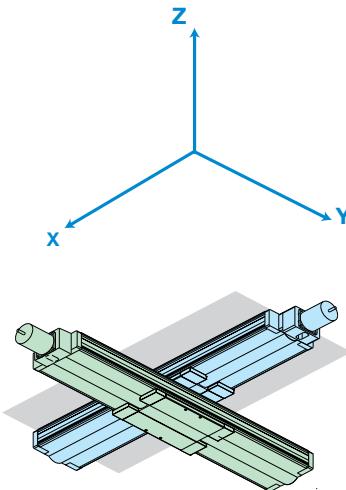


Figure 3
Two Axis (X-Y) Inverted Mounting




Figure 4
Two Axis-Carriage to Carriage (Y Axis Inverted)

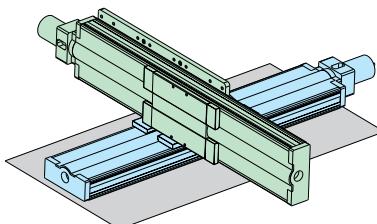


Figure 5
Two Axis (X-Y) Cartesian Horizontal Mounting

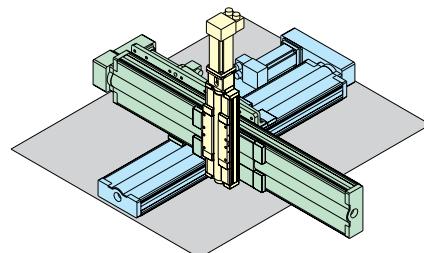


Figure 6
Three Axis (X-Y-Z) Cartesian Horizontal Mounting

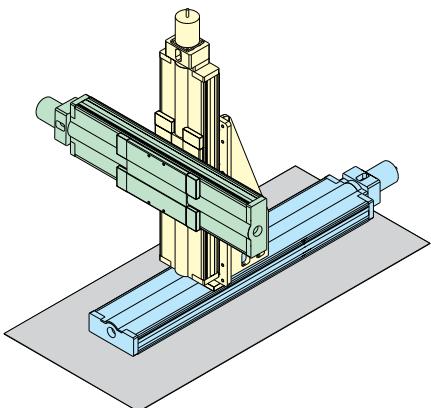


Figure 7
Three Axis (X-Z-Y) Horizontal Mounting

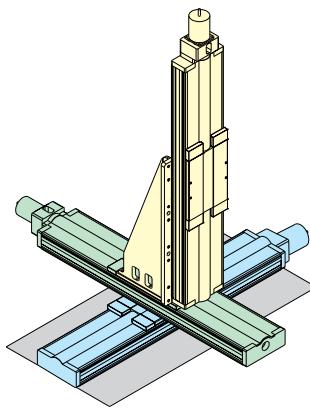


Figure 8
Three Axis (X-Y-Z) Horizontal Mounting

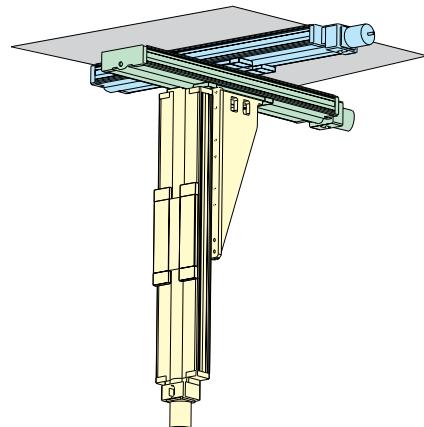


Figure 9
Three Axis (X-Y-Z) Inverted Mounting


DIMENSIONS

401XR Dimensions


Download 2D & 3D files from
www.parker.com/emn/401XR



DIMENSIONS

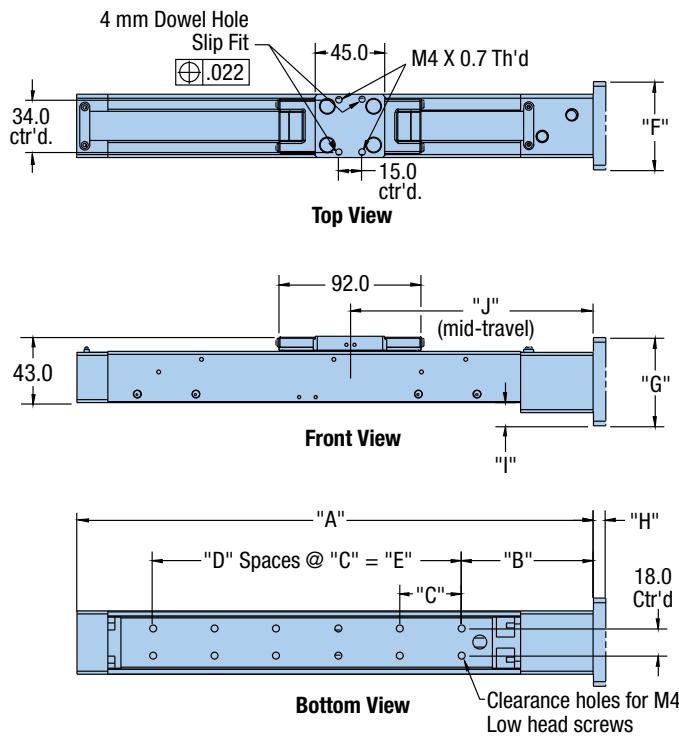

Dimensions (mm)

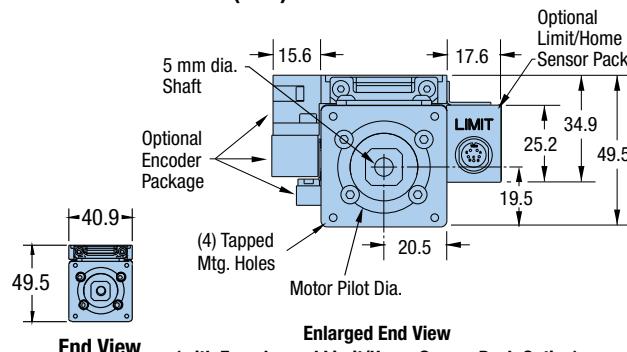


Enlarged End View
 (with Encoder and Limit/Home Sensor Pack Option)

Model	Travel (mm)	Dimensions (mm)					
		A	B	C	D	E	J
401050XR	50	209.3	82.8	80.0	1	80.0	123.0
401100XR	100	284.3	80.3	40.0	4	160.0	160.0
401150XR	150	334.3	85.3	40.0	5	200.0	185.0
401200XR	200	384.3	90.3	40.0	6	240.0	210.0
401300XR	300	509.3	92.8	40.0	9	360.0	260.0


Motor Size	Order Code	Dimensions (mm)			
		F	G	H	I
SM 16	M2	40.9	39.1	—	6.5
NEMA 23/SM 23	M3	57.2	57.2	4.0	15.6
NEMA 17	M37	40.9	39.1	—	6.5
BE 23	M61	57.2	57.2	8.0	15.6

In-Line Motor Adapters


Used to easily accommodate the mounting of different servo or stepper motors.




SM 16



NEMA 17



SM 23 or NEMA 23




BE 23

Free sizing and selection support
 from Virtual Engineer at
virtualengineer.com



402XR Dimensions

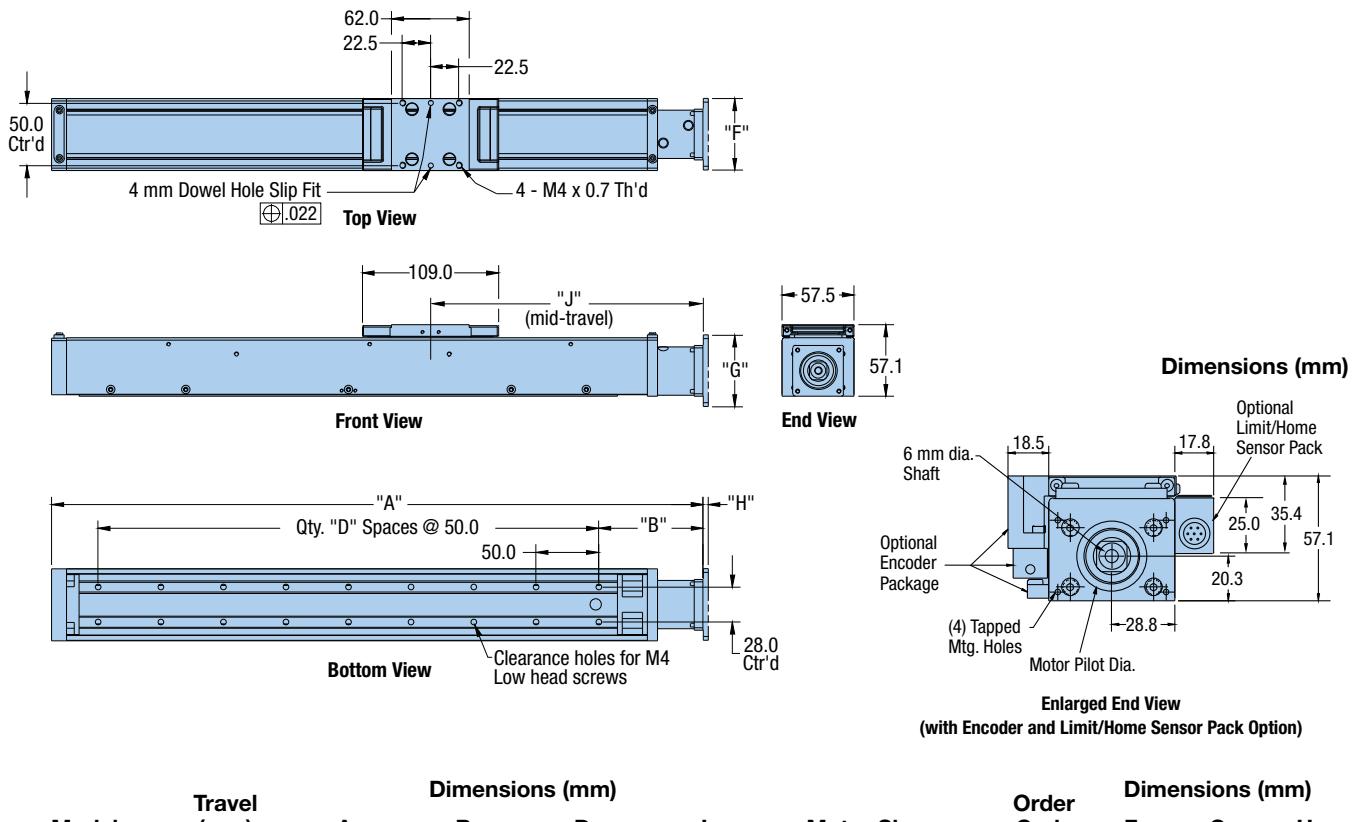


Model	Travel (mm)	Dimensions (mm)			
		A	B	D	J
402100XR	100	320.5	83.5	4	184.0
402150XR	150	370.5	83.5	5	214.0
402200XR	200	420.5	83.5	6	234.0
402300XR	300	520.5	83.5	8	284.0
402400XR	400	620.5	83.5	10	334.0
402600XR	600	820.5	83.5	14	434.0


Motor Size	Order Code	Dimensions (mm)		
		F	G	H
SM 16	M2	40.6	40.6	—
NEMA 23/SM 23	M3	57.2	57.2	4.0
NEMA 17	M37	40.6	40.6	—
BE 23	M61	57.2	57.2	8.0

In-Line Motor Adapters


Used to easily accommodate the mounting of different servo or stepper motors.




SM 16



NEMA 17



SM 23 or NEMA 23




BE 23

Free sizing and selection support
from Virtual Engineer at
virtualengineer.com






404XR Dimensions

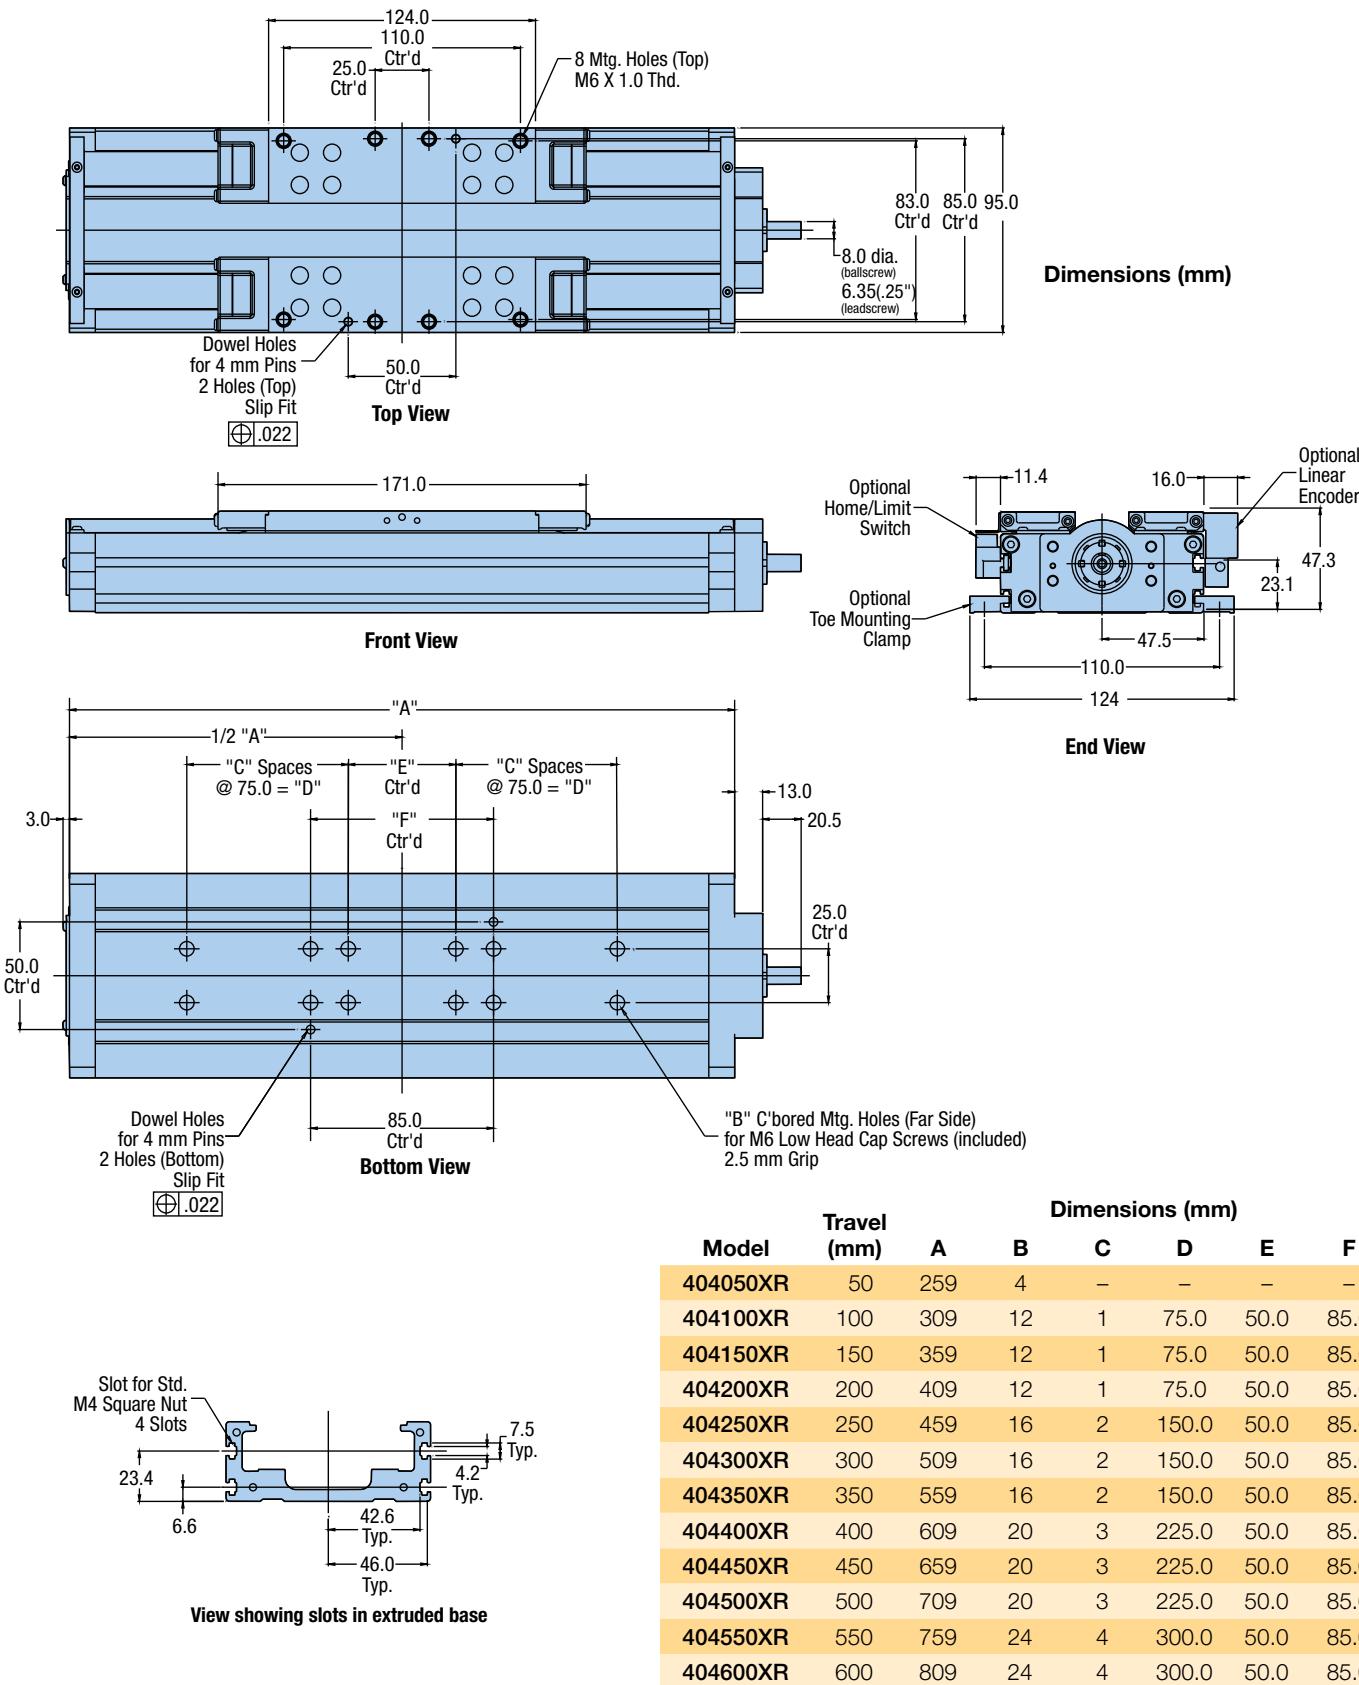

404XR Standard In-Line Motor Mounting


In-line motor mounting allows the motor to be mounted directly to the drive screw via the selected motor coupling.

Used to easily accommodate the mounting of different frame sizes. These adapter plates can be ordered separately by part number below.

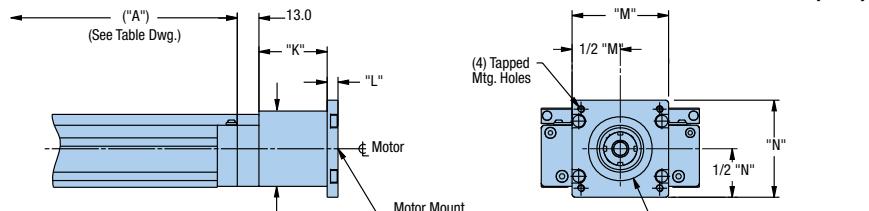


Dimensions (mm)


Motor Size	Order Code	Max. Motor Shaft Ø	K	L	M	N	P
SM 16	M2	9.5	41.0	4.3	58.0	43.0	42.7
NEMA 23	M3	9.5	41.0	6.5	58.0	58.0	42.7
NEMA 34	M4	9.5	41.0	12.5	83.0	83.0	42.7
NEO 70	M21	11.0	55.0	—	69.9	69.9	69.9




SM 16



NEMA 23



NEMA 34




NEOMETRIC 70/SMN060

404XR Universal Motor Mounting


The new Universal Motor Adapter (UMA) makes adapting 3rd party motors to the 404XR easier than ever. The Universal Motor Adaptor option allow for the coupling of motor frame sizes from 62 mm on down, accommodating motor shaft diameters up to 16 mm. To determine if a 404XR has a mount to your preferred motor please visit www.parker.com/emn/404XR, and launch the online eConfigurator (note that these adapter kits establish fit to the actuator only, proper actuator sizing should still be conducted to ensure application performance).

Coupling Style	"K"	Motor Shaft Length	"L"
Oldham	12.5	16 – 35	16.5
Bellows	12.5	35.1 – 41	22.5



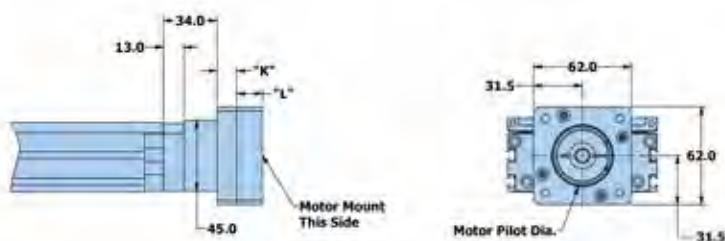


404XR Parallel Motor Mounting

Parallel motor mounting is employed whenever a shorter overall unit length is needed. The motor is positioned along the sides or bottom of the table as designated by position A, B, or C. (No coupling required.)

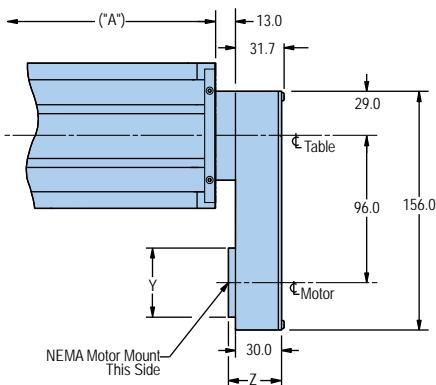

Dimensions			
Motor Size	Y (mm)	Z (mm)	Motor Shaft Ø
SM 16	45.0	34.5	0.250"
SM 23/BE 23	58.0	34.5	0.375"
NEMA 23	58.0	34.5	0.250"


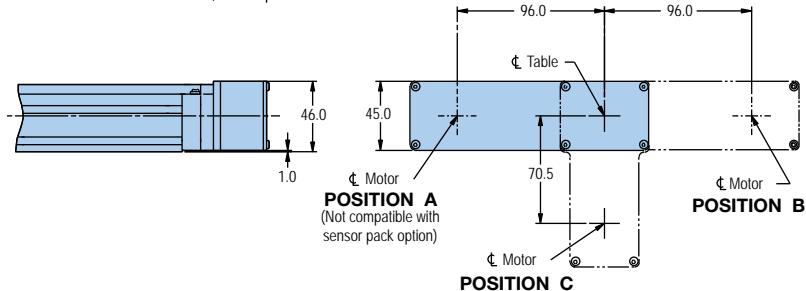


Free sizing and selection support
from Virtual Engineer at
virtualengineer.com





406XR Dimensions


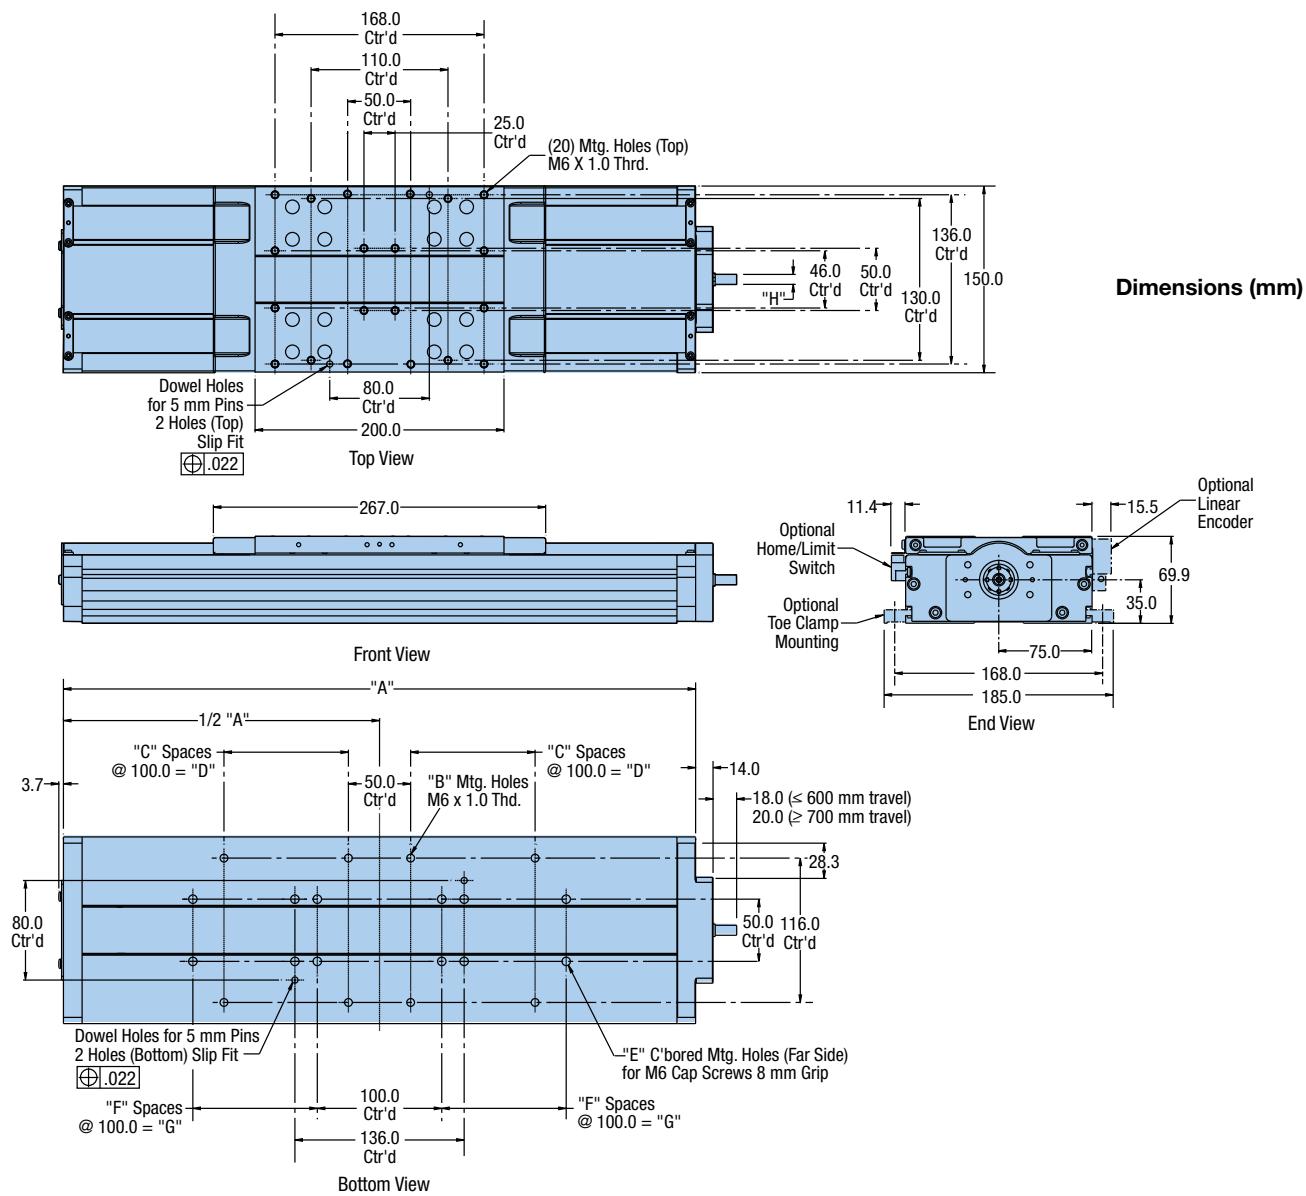


Model	Travel (mm)	Ø	Dimensions (mm)							
			A	B	C	D	E	F	G	H
4060100XR	100	16	408	8	1	100.0	12	1	100.0	8.0
4060200XR	200	16	508	8	1	100.0	12	1	100.0	8.0
4060300XR	300	16	608	12	2	200.0	16	2	200.0	8.0
4060400XR	400	16	708	12	2	200.0	16	2	200.0	8.0
4060500XR	500	16	808	16	3	300.0	20	3	300.0	8.0
4060600XR	600	16	908	16	3	300.0	20	3	300.0	8.0
4060700XR	700	25	1008	20	4	400.0	24	4	400.0	10.0
4060800XR	800	25	1108	20	4	400.0	24	4	400.0	10.0
4060900XR	900	25	1208	24	5	500.0	28	5	500.0	10.0
4061000XR	1000	25	1308	24	5	500.0	28	5	500.0	10.0
4061250XR	1250	25	1558	32	7	700.0	32	6	600.0	10.0
4061500XR	1500	25	1808	36	8	800.0	40	8	800.0	10.0
4061750XR	1750	25	2058	40	9	900.0	44	9	900.0	10.0
4062000XR	2050	25	2308	44	10	1000.0	48	10	1000.0	10.0


406XR In-Line Motor Mounting

In-line motor mounting allows the motor to be mounted directly to the drive screw via the selected motor coupling.


Used to easily accommodate the mounting of different frame sizes. These adapter plates can be ordered separately by part number below.

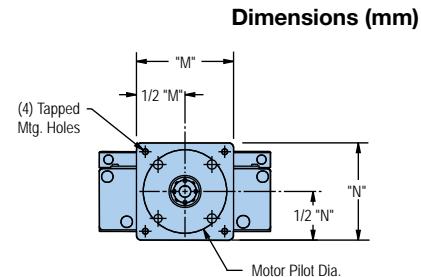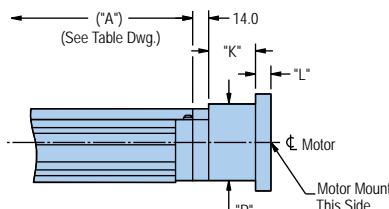


Motor Size	Order Code	Max. Motor Shaft Ø	Dimensions (mm)				
			K	L	M	N	P
MPP092	M90	16.0	53.0	12.5	92.0	92.0	69.0
NEMA 23/SM 23	M3	9.5	41.0	—	85.0	64.0	64.0
NEMA 34	M4	16.0	53.0	13.5	85.0	85.0	69.0
NEO 34	M17	16.0	53.0	13.5	85.0	85.0	69.0
NEO 70	M21	16.0	53.0	—	85.0	69.0	69.0
NEO 92	M29	16.0	53.0	12.5	92.0	92.0	69.0




NEMA 23 or SM 23



NEO 70 / SMN060



NEMA 34 or NEO 34





MPP092

406XR Universal Motor Mounting

The new Universal Motor Adapter (UMA) makes adapting 3rd party motors to the 406XR easier than ever. The Universal Motor Adaptor option allow for the coupling of motor frame sizes from 90 mm on down, accommodating motor shaft diameters up to 20.5 mm. To determine if a 406XR has a mount to your preferred motor please visit www.parker.com/emn/406XR, and launch the online eConfigurator (note that these adapter kits establish fit to the actuator only, proper actuator sizing should still be conducted to ensure application performance).


Coupling Style	"K"
Oldham	35.8
Bellows	47.8

Motor Shaft Length	"L"
20 – 40	20.0
40.1 – 28.5	28.5

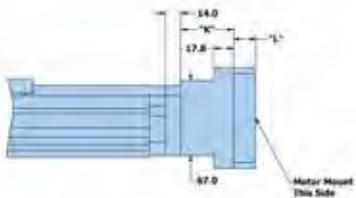


406XR Parallel Motor Mounting

Parallel motor mounting is employed whenever a shorter overall unit length is needed. The motor is positioned along the sides or bottom of the table as designated by position A, B, or C. (No coupling required.)

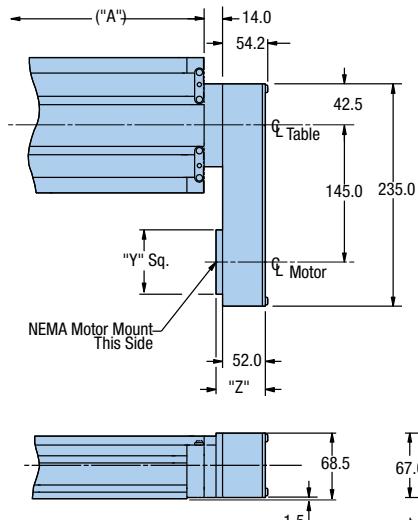

MPP092	92.0	65.7	16.0 mm
NEMA 34	83.0	62.0	0.375"
NEO 34	83.0	62.0	0.500"
NEO 70	70.0	60.0	11.0 mm
SM23/BE23	70.0	57.5	0.375"

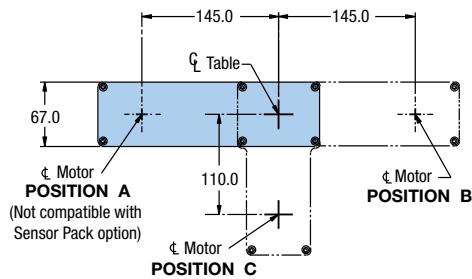


Free sizing and selection support
from Virtual Engineer at
virtualengineer.com







412XR Dimensions

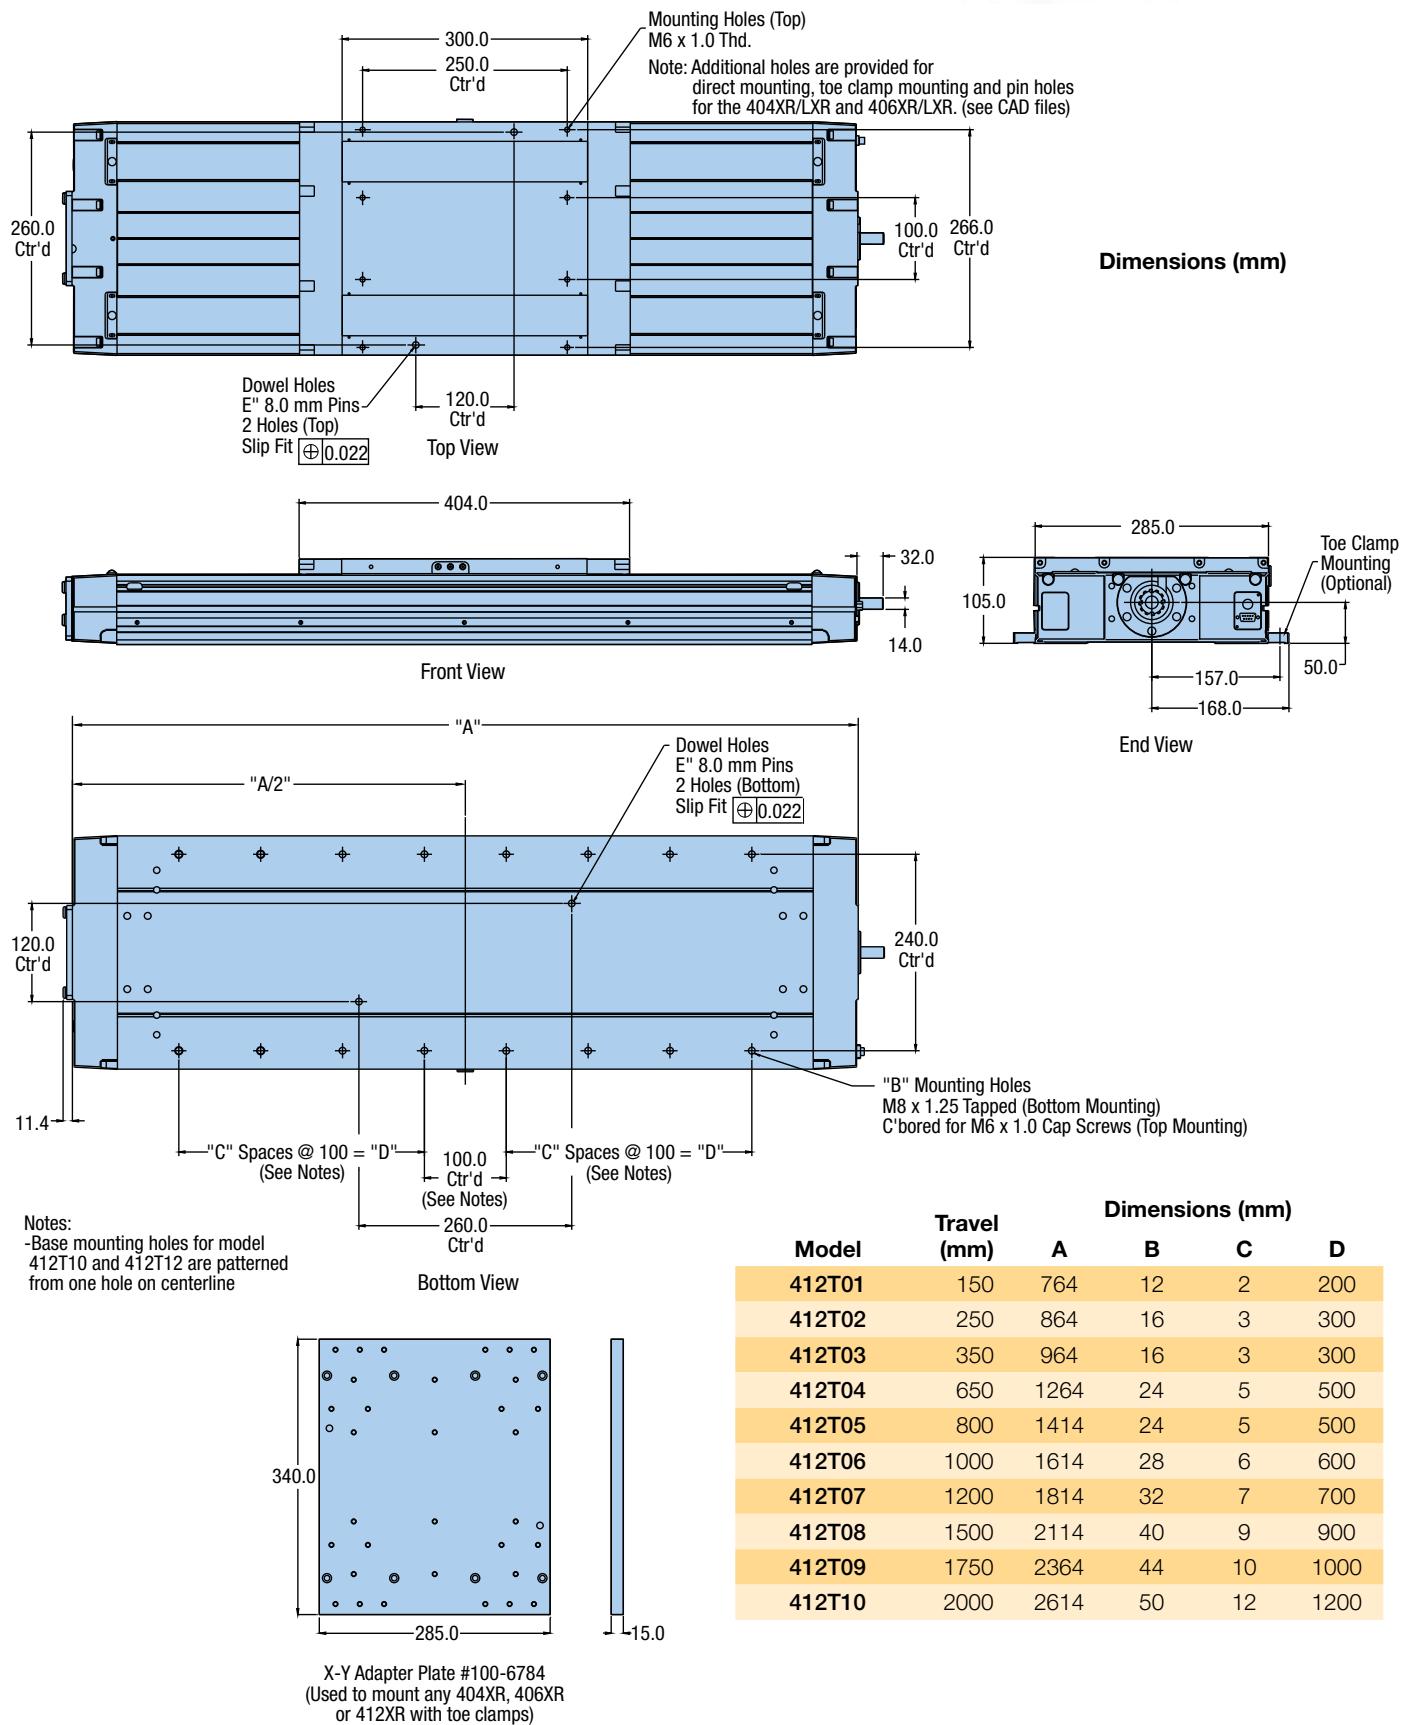





412XR In-Line Motor Mounting

In-line motor mounting allows the motor to be mounted directly to the drive screw via the selected motor coupling.

Used to easily accommodate the mounting of different frame sizes. These adapter plates can be ordered separately by part number below.

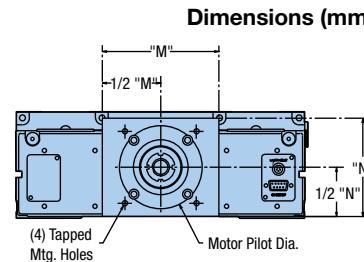

Motor Size	Order Code	K	L	M	N
MPP092	M90	68.0	12.0	115.0	97.0
M105, SMN100	M33	100.0	—	115.0	115.0
NEMA 34	M4	68.0	12.0	115.0	97.0
NEO 34	M17	68.0	12.0	115.0	97.0
NEO 70	M21	68.0	—	115.0	97.0
NEO 92	M29	68.0	12.0	115.0	97.0



NEO 70 / SMN060


NEMA 34 or NEO 34

MPP092

M105 / SMN100


412XR Parallel Motor Mounting

Parallel motor mounting is employed whenever a shorter overall unit length is needed. The motor is positioned along the sides or bottom of the table as designated by position A, B, or C. (No coupling required.)

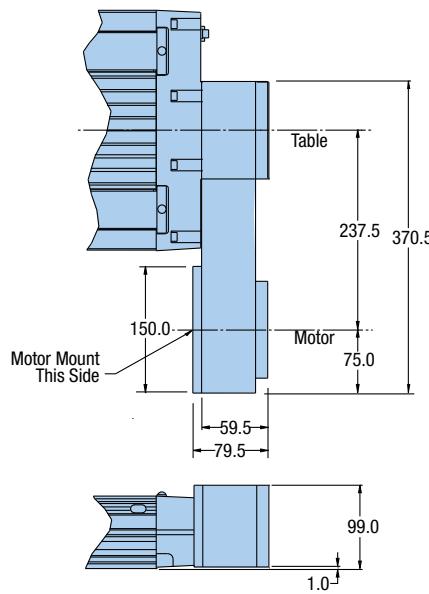

Dimensions

Motor Size	Bolt Circle (mm)	Pilot Ø (mm)	Shaft Ø
MPP092	100.0	80.0	16.0 mm
NEMA 34	98.4	73.2	0.375"
NEO 34	98.4	73.2	0.500"
NEO 70	75.0	60.1	11.0 mm
NEO 92	100.0	80.1	14.0 mm

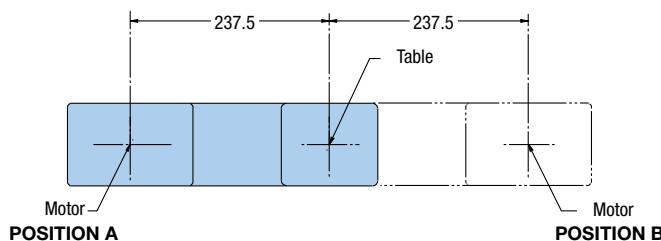

OPTIONS & ACCESSORIES

OPTIONS & ACCESSORIES

400XR Series Options


Home or Limit Sensor Options

End of Travel and Home Sensors for the 400XR series are available in a variety of styles. The sensors can be ordered as part of the table or as separate components with the associated mounting hardware or in an enclosed sensor pack. A 5 meter high-flex extension cable (Part No. 003-2918-01) is included for use with the 401XR thru 406XR models having the locking connector option.



- NPN (Sinking) or PNP (Sourcing)
- Normally Closed (N.C.) or Normally Open (N.O.)
- Flying Leads or Locking Connector

Specifications

Input Power	5-30 VDC, 20 mA
Output	100mA max
Wire Color	(+) Supply: Brown
Code	(-) Supply: Blue NO Output: Black NC Output: White

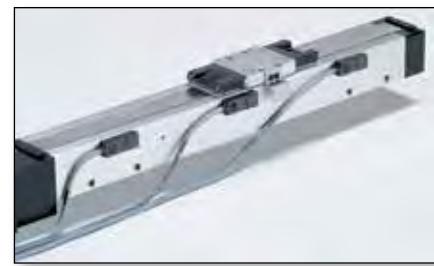

401XR Limits and Home Sensor

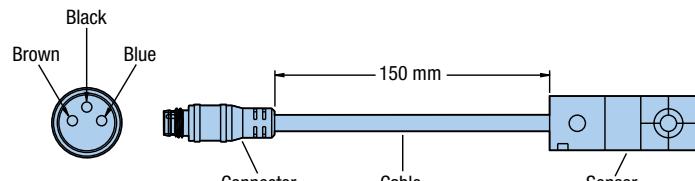


Sensor / Bracket Detail

Order Code	Part Number*	Switch Type	Logic	Cable Length	Connector Option
H2 or L2	006-1639-01	N.C.	Sinking	3.0 m	Flying Leads
H3 or L3	006-1639-02	N.O.	Sinking	3.0 m	Flying Leads
H4 or L4	006-1639-03	N.C.	Sourcing	3.0 m	Flying Leads
H5 or L5	006-1639-04	N.O.	Sourcing	3.0 m	Flying Leads
H6 or L6	006-1639-09	N.C.	Sinking	150 mm	Locking Connector
H7 or L7	006-1639-08	N.O.	Sinking	150 mm	Locking Connector
H8 or L8	006-1639-11	N.C.	Sourcing	150 mm	Locking Connector
H9 or L9	006-1639-10	N.O.	Sourcing	150 mm	Locking Connector
H11 or L11	See chart below	N.C.	Sinking	See chart below	Sensor Pack
H12 or L12	See chart below	N.O.	Sinking	See chart below	Sensor Pack
H13 or L13	See chart below	N.C.	Sourcing	See chart below	Sensor Pack
H14 or L14	See chart below	N.O.	Sourcing	See chart below	Sensor Pack

* Applies to 401XR thru 406XR models. 412XR models have limits and homes internally mounted with a connector termination. Sensor triggers (targets) ordered separately.

Sensor Pack Cable



Description	Part Number	Wire Color	Function	Pin Number
3 Meters	006-1742-01	Red	+5 to +24 VDC	A
7.5 Meters	006-1742-02	Blue	Limit 1 (LXR -)	B
		Orange	Limit 2 (LXR +)	C
		Green	Home	D
		Black	Ground	E
		Green/Yellow	Shield	Shield Case

406XR with Limit and Home Sensor Pack

Linear Encoder Options (Tape Scale)

A linear position feedback device which mounts directly to the table carriage. (Factory installation required.)

- 1.0 μm resolution
- 0.5 μm resolution
- 0.1 μm resolution



Specifications

Input Power	5 VDC, 150mA
Output	A/B quadrature and reference mark, differential line drive output
Resolution	1.0, 0.5, 0.1 micron
Cable Length	3 m




401XR with Linear Encoder
plus Sensor Pack

Rotary Encoder Option

Modular rotary encoder couples directly to the drive screw for position feedback and is easily field installed. The rotary encoder cannot be installed with the brake assembly option.

- 5000 counts/rev



Note: Dimensions shown apply to 404XR and 406XR models. Consult factory for 412XR dimensions.

Specifications

Input Power	5 VDC, 135 mA
Output	A/B quadrature and reference mark, differential line drive output
Resolution	1250 lines/rev equals 5000 counts post quadrature (1 μm with 5 mm lead ballscrew)
Cable Length	150 mm

Brake Assembly Option

Electromagnetic brake assembly is used to prevent "backdriving" in vertical applications. The brake option includes a 5 meter extension cable. The brake option is easily field installed. The brake option cannot be installed with the rotary encoder option.



404XR with Brake Option

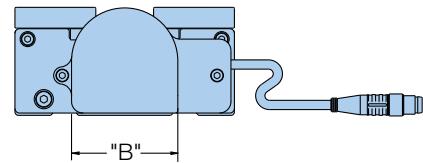



Table Series	Part Number	Input Power	Holding Torque	Dimensions (mm)	
				A	B
401XR/402XR	—	—	—	—	—
404XR	006-1627-01	24 VDC, 0.46 A	2.0 Nm	41.5	46.0
406XR	006-1656-01	24 VDC, 0.5 A	4.5 Nm	49.9	57.5
412XR	002-1916-01	24 VDC, 0.75 A	9.0 Nm	54.0	72.0


Dowel Pinning Options*

Standard dowel pin locating holes are offered on most 400XR units to facilitate repeatable mounting of tooling or payload.*

In addition, pinning options are offered for precise orthogonal mounting of the second axis in a multi-axis system. In this case, the bottom side of the table base is match drilled and reamed to the first axis to provide exact orthogonal location.

This convenient option eliminates concerns regarding contamination or damage often associated with machining for locating pins in an assembled unit.

*Not available with 401XR or 402XR or 50 mm travel 404XR.

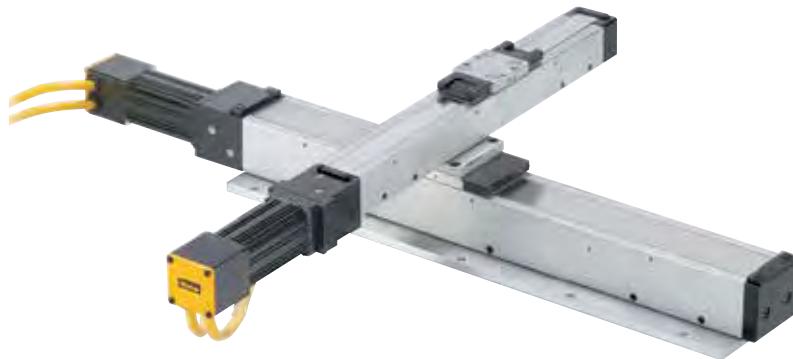

Two locating dowel pins shown in carriage of a 401XR.

Standard pinning of XY axes will achieve 125 arc-sec of orthogonality. Through transfer pinning, 30 arc-sec is achievable. For high degrees of orthogonality consult the factory.



400XR Universal Motor Adapter (inline only)

The UMA is designed to make it easier than ever for our machine designers to specify their linear stage with whatever motor they'd like, while avoiding the often drawn out "customization" process.



Quick Motor Integration


The Universal Motor Adapter (UMA) is an innovative motor mount component that allows for simple configuration of the 404XR or 406XR to a variety of servo or steppers from a plethora of manufacturers. Utilizing a vast database of motor mounting flanges, the UMA allows for rapid integration of hundreds of motors from numerous manufacturers.

Convenient Ordering

For customers choosing to mount a third party, non-Parker motor, the UMA alleviates the hassle and lead time of having to create a "customized" motor mount. Typically, designers would have to place an additional custom motor request for a specific mount, but now designers can simply configure the motor manufacturer right into the XR part number

Easy Selection with Our Online e-Configurator

Now with the UMA, you can easily choose the right option for your motor through our online e-Configurator, saving time and money. With the UMA integrated into the e-Configurator, simply selecting the desired motor manufacturer and model type will configure the actuator with the appropriate selected motor.

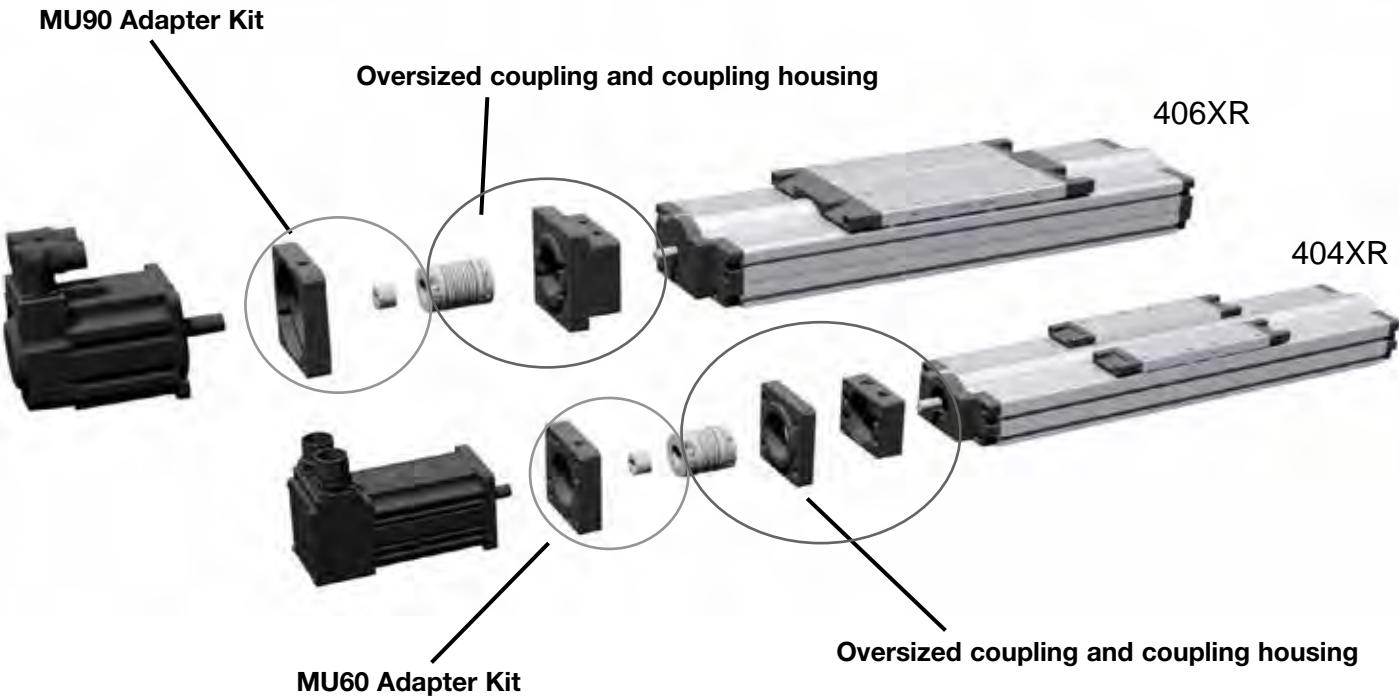


How to Order the Right Motor Mount

Motor mount configuration to 3rd party motors is now easier than ever through use of the universal motor adapter (UMA), and our online product configuration tool. Consult the online e-Configurator for a complete listing of supported motors.

If you do not find a specific motor you would like use in your application, please call our application's team at 1-800-358-9070.

STEP 1
In order to specify a 404 or 406 XR with a third party motor mount, launch the online configurator tool from www.parker.com/emn/400XR and for the appropriate 404 or 406 XR.

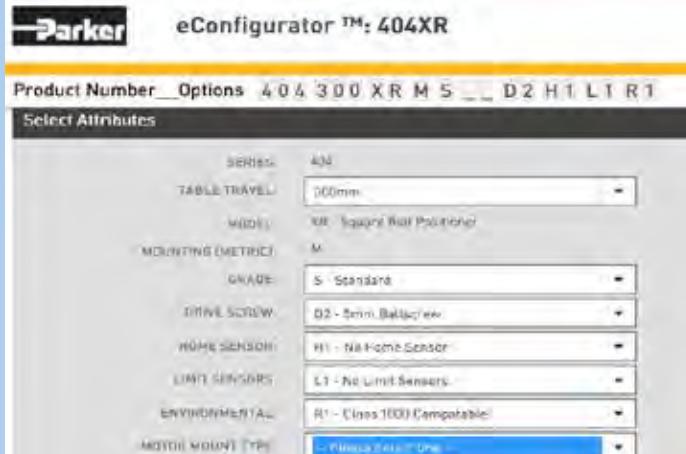

STEP 2
Configure the XR with all desired options and then specify the motor mount type. Select Standard for Parker motors or Universal for other motors.

-- Please Select One --
Standard [M*]
Universal [U*]

STEP 3
Select the motor manufacturer.

Parker Europe
Parker North America
Parker SSD

STEP 4
After motor manufacturer, choose the exact motor series from that manufacturer. This will automatically select the appropriate motor mount for the 400 XR stage.

-- Please Select One --
N034
N070
N092
OS21 or OS22 or OS2H
PM-FAL
PM-FBL
PX60
S57 Series

STEP 5
Finally, select from either Bellows or Oldham style coupling options.

-- Please Select One --
BW - Bellows
OH - Oldham


Riser Plate Accessory

Used to raise the table base to provide clearance for motors.

Model	Part Number
401XR	002-2063-01
402XR	002-2064-01
404XR	002-3619-01
406XR	002-3625-01
412XR	—

401XR/402XR

Part Number: 002-2063-01/ 002-2064-01




Dimensions (mm)

Table Series	A	B	C
401XR	65.0	50.4	17.0
402XR	90.0	75.4	10.0


404XR

Part Number: 002-3619-01

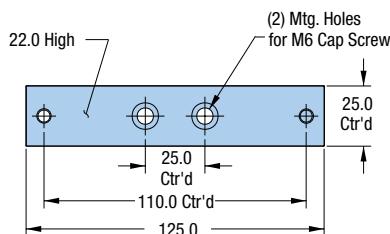

406XR

Part Number: 002-3625-01

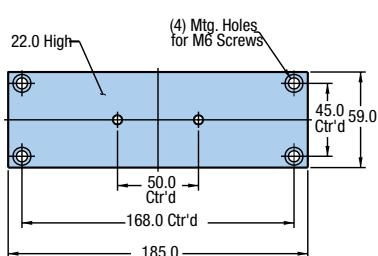


Toe Clamp Accessory

Used for convenient outboard mounting of table to a base plate, riser plates, Z-axis bracket, or other 400XR table. All hardware is included.

Model	Part Number
404XR	002-3618-01
406XR	002-3624-01
412XR	002-2160-01


404XR

Part Number: 002-3618-01




406XR

Part Number: 002-3624-01



412XR

Part Number: 002-2160-01



ORDERING INFORMATION

401XR

ORDERING INFORMATION

Fill in an order code from each of the numbered fields to create a complete model order code.

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫

Order Example:	401	100	XR	M	S	D9	H3	L2	C3	M2	E2	R1
-----------------------	-----	-----	----	---	---	----	----	----	----	----	----	----

① Series * 401	⑧ Limit Sensor ** L1 None L2 N.C. Current Sinking Flying Leads L3 N.O. Current Sinking Flying Leads L4 N.C. Current Sourcing Flying Leads L5 N.O. Current Sourcing Flying Leads L6 N.C. Current Sinking Locking Connector L7 N.O. Current Sinking Locking Connector L8 N.C. Current Sourcing Locking Connector L9 N.O. Current Sourcing Locking Connector L11 N.C. Current Sinking Sensor Pack L12 N.O. Current Sinking Sensor Pack L13 N.C. Current Sourcing Sensor Pack L14 N.O. Current Sourcing Sensor Pack
② Travel - mm * 050 50 100 100 150 150 200 200 300 300	⑨ Motor Coupling C1 No Coupling C2 6.3 mm (0.25 in) Bore Oldham C3 6.3 mm (0.25 in) Bore Bellows C5 9.5 mm (0.375 in) Bore Bellows C24 5 mm (0.20 in) Bore Oldham C25 5 mm (0.20 in) Bore Bellows
③ Model XR Linear Table	⑩ Motor Mount M2 SM 16 In-Line Mounting M3 NEMA 23 In-Line Mounting (0.375" dia. shaft) M37 NEMA 17 In-Line Mounting M61 BE 23 In-Line Mounting
④ Mounting M Metric	⑪ Encoder Option E1 None E2 1.0 µm Resolution E3 0.5 µm Resolution E4 0.1 µm Resolution
⑤ Grade S Standard P Precision (E3 or E4 encoder option required)	⑫ R1 Required Designator
⑥ Drive Screw * D3 10 mm Lead D9 2 mm Lead	
⑦ Home Sensor ** H1 None H2 N.C. Current Sinking Flying Leads H3 N.O. Current Sinking Flying Leads H4 N.C. Current Sourcing Flying Leads H5 N.O. Current Sourcing Flying Leads H6 N.C. Current Sinking Locking Connector H7 N.O. Current Sinking Locking Connector H8 N.C. Current Sourcing Locking Connector H9 N.O. Current Sourcing Locking Connector H11 N.C. Current Sinking Sensor Pack H12 N.O. Current Sinking Sensor Pack H13 N.C. Current Sourcing Sensor Pack H14 N.O. Current Sourcing Sensor Pack	

* Drive Screw Lead Availability

Travel	401XR	
	2 mm	10 MM
50	•	
100	•	
150	•	
200		•
300		•

** 50 mm stroke 401XR may only allow room for 2 sensors in sensor pack.

Free sizing and selection support
from Virtual Engineer at
virtualengineer.com



Fill in an order code from each of the numbered fields to create a complete model order code.

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫

Order Example:	402	100	XR	M	S	D9	H3	L2	C3	M2	E2	R1
-----------------------	-----	-----	----	---	---	----	----	----	----	----	----	----

① **Series ***

402

② **Travel - mm ***

100	100
150	150
200	200
300	300
400	400
600	600

③ **Model**

XR Linear Table

④ **Mounting**

M Metric

⑤ **Grade**

S Standard

P Precision (E3 or E4 encoder option required)

⑥ **Drive Screw ***

D2	5 mm Lead
D3	10 mm Lead

⑦ **Home Sensor**

H1	None
H2	N.C. Current Sinking Flying Leads
H3	N.O. Current Sinking Flying Leads
H4	N.C. Current Sourcing Flying Leads
H5	N.O. Current Sourcing Flying Leads
H6	N.C. Current Sinking Locking Connector
H7	N.O. Current Sinking Locking Connector
H8	N.C. Current Sourcing Locking Connector
H9	N.O. Current Sourcing Locking Connector
H11	N.C. Current Sinking Sensor Pack
H12	N.O. Current Sinking Sensor Pack
H13	N.C. Current Sourcing Sensor Pack
H14	N.O. Current Sourcing Sensor Pack

⑧ **Limit Sensor**

L1	None
L2	N.C. Current Sinking Flying Leads
L3	N.O. Current Sinking Flying Leads
L4	N.C. Current Sourcing Flying Leads
L5	N.O. Current Sourcing Flying Leads
L6	N.C. Current Sinking Locking Connector
L7	N.O. Current Sinking Locking Connector
L8	N.C. Current Sourcing Locking Connector
L9	N.O. Current Sourcing Locking Connector
L11	N.C. Current Sinking Sensor Pack
L12	N.O. Current Sinking Sensor Pack
L13	N.C. Current Sourcing Sensor Pack
L14	N.O. Current Sourcing Sensor Pack

⑨ **Motor Coupling**

C1	No Coupling
C2	6.3 mm (0.25 in) Bore Oldham
C3	6.3 mm (0.25 in) Bore Bellows
C4	9.5 mm (0.375 in) Bore Oldham*
C5	9.5 mm (0.375 in) Bore Bellows
C24	5 mm (0.20 in) Bore Oldham
C25	5 mm (0.20 in) Bore Bellows

*NEMA 23 frame size only (M3, M61)

⑩ **Motor Mount**

M2	SM 16 In-Line Mounting
M3	NEMA 23 In-Line Mounting
M37	NEMA 17 In-Line Mounting
M61	BE 23 In-Line Mounting

⑪ **Encoder Option**

E1	None
E2	1.0 µm Resolution
E3	0.5 µm Resolution
E4	0.1 µm Resolution

⑫ **R1** Required Designator

* **Drive Screw Lead Availability**

Travel	402XR	
	5 mm	10 mm
100	•	
150	•	
200	•	
300		•
400		•
600		•

404XR

Fill in an order code from each of the numbered fields to create a complete model order code.

①	②	③	④	⑤	⑥	⑦	⑧	⑨	⑩	⑪	⑫	⑬	⑭		
Order Example:	404	450	XR	M	S	-	D33	H4	L2	C3	M4	E1	B1	R1	P1

①	Series 404	H11 H12 H13 H14	N.C. Current Sinking Sensor Pack** N.O. Current Sinking Sensor Pack** N.C. Current Sourcing Sensor Pack** N.O. Current Sourcing Sensor Pack**
②	Travel - mm *		
	050	50 (no pinning available)	
	100	100	
	150	150	
	200	200	
	250	250	
	300	300	
	350	350	
	400	400	
	450	450	
	500	500	
	550	550	
	600	600	
③	Model		
	XR	Linear Table	
④	Mounting		
	M	Metric	
⑤	Grade		
	S	Standard	
	P	Precision (only available with D2, D3, D4 drive screws)	
⑥	Drive Screw		
	D1	Free Travel	
	D2	5 mm Ballscrew	
	D3	10 mm Ballscrew	
	D4	20 mm Ballscrew (standard grade only)	
	D31***	1 mm V Thread Leadscrew	
	D32***	2 mm V Thread Leadscrew	
	D33***	5 mm V Thread Leadscrew	
	D34***	0.10" V Thread Leadscrew	
	D35***	0.10" Acme Thread Leadscrew	
⑦	Home Sensor Assembly (one sensor)		
	H1	None-Free Travel (only)	
	H2	N.C. Current Sinking Flying Leads	
	H3	N.O. Current Sinking Flying Leads	
	H4	N.C. Current Sourcing Flying Leads	
	H5	N.O. Current Sourcing Flying Leads	
	H6	N.C. Current Sinking Locking Connector*	
	H7	N.O. Current Sinking Locking Connector*	
	H8	N.C. Current Sourcing Locking Connector*	
	H9	N.O. Current Sourcing Locking Connector*	
⑧	Travel Limit Sensor Assembly (two sensors)		
	L1	None-Free Travel (only)	
	L2	N.C. Current Sinking Flying Leads	
	L3	N.O. Current Sinking Flying Leads	
	L4	N.C. Current Sourcing Flying Leads	
	L5	N.O. Current Sourcing Flying Leads	
	L6	N.C. Current Sinking w/Locking Connector*	
	L7	N.O. Current Sinking w/Locking Connector*	
	L8	N.C. Current Sourcing w/Locking Connector*	
	L9	N.O. Current Sourcing w/Locking Connector*	
	L11	N.C. Current Sinking Sensor Pack**	
	L12	N.O. Current Sinking Sensor Pack**	
	L13	N.C. Current Sourcing Sensor Pack**	
	L14	N.O. Current Sourcing Sensor Pack**	
	<p>Motor Interface Option</p> <ul style="list-style-type: none"> • Standard Parker Motor Adapters (go to Standard Parker options in blue) -OR- • Universal Motor Adapter for other motors (go to Universal Motor Adapter in grey) 		
⑨	Standard Parker Motor Adapters		
	C1	No Coupling (required for parallel mounting)	
	C2	0.250" Oldham	
	C3	0.250" Bellows (required for precision grade)	
	C4	0.375" Oldham	
	C5	0.375" Bellows (required for precision grade)	
	C6	11 mm Oldham	
	C7	11 mm Bellows (required for precision grade)	
	C10	14 mm Oldham (M75 motor option)	
	C11	14 mm Bellows (M75 motor option)	
	C22	9 mm Oldham	
	C23	9 mm Bellows	
	C24	5 mm Oldham (M37 motor option)	
	C25	5 mm Bellows (M37 motor option)	
	C26	8 mm Oldham (M71 motor option)	
	C27	8 mm Bellows (M71 motor option)	
	C28	0.1875" Oldham (M37 motor option)	
	C29	0.1875" Bellows (M37 motor option)	

(Motor Coupling continued next page)

* Sensors with locking connector include 5 m extension cable.

** Sensor Pack includes 3 m cable.

*** Leadscrew is available only in custom builds - it is not a standard option.

Fill in an order code from each of the numbered fields to create a complete model order code.

Standard Parker Motor Adapters

(Motor Coupling continued)	
C30	0.250" Oldham (couplings for leadscrew grade)
C31	0.250" Bellows (couplings for leadscrew grade)
C32	0.375" Oldham (couplings for leadscrew grade)
C33	0.375" Bellows (couplings for leadscrew grade)
C39	9 mm Bellows (couplings for leadscrew grade)
Motor Mount *	
M1	No Motor Mount
M2	SM 16 In-Line Mounting
M3	NEMA 23 & SM 23 In-Line Mounting
M4	NEMA 34 In-Line Mounting
M5	SM 16 Parallel Mounting, "A" Location*
M6	SM 16 Parallel Mounting, "B" Location*
M7	SM 16 Parallel Mounting, "C" Location*
M8	NEMA 23 Parallel Mounting, "A" Location*
M9	NEMA 23 Parallel Mounting, "B" Location*
M10	NEMA 23 Parallel Mounting, "C" Location*
M11	SM 23 Parallel Mounting, "A" Location*
M12	SM 23 Parallel Mounting, "B" Location*
M13	SM 23 Parallel Mounting, "C" Location*
M21	Neometric 70 In-Line Mounting
M37	NEMA 17 In-Line Mounting
M42	SM232AQ NPSN Servo Motor In-Line Mounting
M46	HV232-02-10 Stepper Motor In-Line Mounting
M49	Handcrank without Readout
M50	Handcrank with Readout (0.10" or 1 mm leads only)
M51	HDY55 In-Line Mounting
M61	BE 23 In-Line Mounting
M62	BE 23 Parallel Mounting, "A" Location*
M63	BE 23 Parallel Mounting, "B" Location*
M64	BE 23 Parallel Mounting, "C" Location*
M71	PM-FAL In-Line Mounting
M72	PM-FAL In-Line Mounting, "A" Location*
M73	PM-FAL In-Line Mounting, "B" Location*
M74	PM-FAL In-Line Mounting, "C" Location*
M75	PM-FBL In-Line Mounting

* See 404XR dimensions for maximum allowable motor shaft diameter. Parallel motor mounts not available with leadscrew drives.

► Continue to step ⑪ for Encoders in the order process.

Universal Motor Adapter	⑨ Motor Coupling
	BW Bellows coupling option OH Oldham coupling option
⑩ Motor Mount	⑩ Motor Mount
	U### Consult the online eConfigurator at www.parker.com/emn/404XR to create a complete part number for the desired 404XR with motor mounting to a 3 rd party motor. For more details on how to use the online configurator, see "How to Order the Right Motor Mount" in this product catalog

⑪ Encoder Option
E1 No Encoder
E2 1.0 µm Resolution Linear Encoder (tape scale)
E3 0.5 µm Resolution Linear Encoder (tape scale)
E4 0.1 µm Resolution Linear Encoder (tape scale)
E5 Rotary Shaft Encoder (not available with brake)
⑫ Brake Option
B1 No Brake
B2 Shaft Brake (Refer to 404XR holding torque specifications to confirm maximum load. Not available with rotary encoder)
⑬ Cleanroom Preparation
R1 Standard Environment
R2 Class 10 Compatible (consult factory)
R5 Standard Environment with Easy Lube System †
⑭ Pinning Option *
P1 No multi-axis pinning
P2*** X axis transfer pinning to Y or Z axis - 30 arc-sec **
P3*** Y axis transfer pinning to X axis - 30 arc-sec
P4*** Z axis transfer pinning to X axis - 30 arc-sec
P5*** X axis transfer pinning to Y axis - 125 arc-sec
P6*** Y axis transfer pinning to X axis - 125 arc-sec

† Sensor pack options L11-L14 cannot be ordered with R5 option on 404XR. Linear encoder options E2-E4 cannot be ordered with R5 option on 404XR. R5 option not available for 50mm travel 404XR units. Consult factory if required.
 * Pinning option is for pinning to other 404XR and 406XR tables. Transfer pinning is not available on some XR to LXR models. Contact factory for more information. Pinning XY orientation standard with Y motor at 3 o'clock position.
 ** Z pinning uses bracket (see figures 7, 8 and 9 in "400XR Multi Axis Configurations")
 ***Consult factory for multi-axis pinning options and quotation

Free sizing and selection support
from Virtual Engineer at
virtualengineer.com



406XR

Fill in an order code from each of the numbered fields to create a complete model order code.

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

Order Example:	406	900	XR	M	S	-	D3	H4	L1	C7	M4	E1	B1	R1	P1
-----------------------	-----	-----	----	---	---	---	----	----	----	----	----	----	----	----	----

① **Series**

406

② **Travel - mm ***

100	100
200	200
300	300
400	400
500	500
600	600
700	700
800	800
900	900
1000	1000
1250	1250
1500	1500
1750	1750
2000	2000

③ **Model**

XR Linear Table

④ **Mounting**

M Metric

⑤ **Grade ***

S	Standard
P	Precision

⑥ **Drive Screw ***

D1	Free Travel
D2	5 mm Ballscrew
D3	10 mm Ballscrew
D4	20 mm Ballscrew
D5	25 mm Ballscrew

⑦ **Home Sensor Assembly (one sensor)**

H1	None
H2	N.C. Current Sinking Flying Leads
H3	N.O. Current Sinking Flying Leads
H4	N.C. Current Sourcing Flying Leads
H5	N.O. Current Sourcing Flying Leads
H6	N.C. Current Sinking Locking Connector**
H7	N.O. Current Sinking Locking Connector**
H8	N.C. Current Sourcing Locking Connector**
H9	N.O. Current Sourcing Locking Connector**
H11	N.C. Current Sinking Sensor Pack***
H12	N.O. Current Sinking Sensor Pack***
H13	N.C. Current Sourcing Sensor Pack***
H14	N.O. Current Sourcing Sensor Pack***

⑧ **Travel Limit Sensor Assembly (two sensors)**

L1	None
L2	N.C. Current Sinking Flying Leads
L3	N.O. Current Sinking Flying Leads
L4	N.C. Current Sourcing Flying Leads
L5	N.O. Current Sourcing Flying Leads
L6	N.C. Current Sinking w/Locking Connector**
L7	N.O. Current Sinking w/Locking Connector**
L8	N.C. Current Sourcing w/Locking Connector**
L9	N.O. Current Sourcing w/Locking Connector**
L11	N.C. Current Sinking Sensor Pack ***
L12	N.O. Current Sinking Sensor Pack***
L13	N.C. Current Sourcing Sensor Pack***
L14	N.O. Current Sourcing Sensor Pack ***

* Drive Screw Lead Availability

Travel	Precision Grade		Standard Grade			
	5 mm	10 mm	5 mm	10 mm	20 mm	25 mm
100	•	•	•	•	•	
200	•	•	•	•	•	
400	•	•	•	•	•	
400	•	•	•	•	•	
500	•	•	•	•	•	
600	•	•	•	•	•	
700			•	•		•
800			•	•		•
900			•	•		•
1000			•	•		•
1250			•	•		•
1500			•	•		•
1750			•	•		•
2000			•	•		•

** Sensors with locking connector include 5 m extension cable.

*** Sensor Pack includes 3 m cable.

Standard Parker Motor Adapters

Motor Interface Option

- Standard Parker Motor Adapters (go to Standard Parker options in **blue**)
- OR-
- Universal Motor Adapter for other motors (go to Universal Motor Adapter in **grey**)

⑨ Motor Coupling

- C1 No Coupling (required for parallel mounting)
- C2 0.250" Oldham
- C3 0.250" Bellows (required for precision grade)
- C4 0.375" Oldham
- C5 0.375" Bellows (required for precision grade)
- C6 11 mm Oldham
- C7 11 mm Bellows (required for precision grade)
- C8 0.500" Oldham
- C9 0.500" Bellows (required for precision grade)
- C10 14 mm Oldham
- C11 14 mm Bellows (required for precision grade)
- C12 16 mm Oldham
- C13 16 mm Bellows (required for precision grade)

⑩ Motor Mount *

- M1 No Motor Mount
- M3 NEMA 23 & SM 23 In-Line Mounting
- M4 NEMA 34 In-Line Mounting
- M11 SM 23 Parallel Mounting, "A" Location*
- M12 SM 23 Parallel Mounting, "B" Location*
- M13 SM 23 Parallel Mounting, "C" Location*
- M14 NEMA 34 Parallel Mounting, "A" Location
- M15 NEMA 34 Parallel Mounting, "B" Location
- M16 NEMA 34 Parallel Mounting, "C" Location
- M17 Neometric 34 In-Line Mounting
- M18 Neometric 34 Parallel Mounting, "A" Location
- M19 Neometric 34 Parallel Mounting, "B" Location
- M20 Neometric 34 Parallel Mounting, "C" Location
- M21 Neometric 70 In-Line Mounting
- M22 Neometric 70 Parallel Mounting, "A" Location
- M23 Neometric 70 Parallel Mounting, "B" Location
- M24 Neometric 70 Parallel Mounting, "C" Location
- M29 Neometric 92 In-Line Mounting
- M61 BE 23 In-Line Mounting
- M62 BE 23 Parallel Mounting, "A" Location
- M63 BE 23 Parallel Mounting, "B" Location
- M64 BE 23 Parallel Mounting, "C" Location
- M75 PM-FBL In-Line Mounting
- M90 MPP092 In-Line Mounting
- M91 MPP092 Parallel Mounting, "A" Location
- M92 MPP092 Parallel Mounting, "B" Location
- M93 MPP092 Parallel Mounting, "C" Location

* See 406XR dimensions for maximum allowable motor shaft diameter. SM 23 parallel motor mounts not available with leadscrew drives.

Continue to step ⑪ for Encoders in the order process.

Motor Coupling

- BW Bellows coupling option
- OH Oldham coupling option

Motor Mount

- U### Consult the online eConfigurator at [www.parker.com/emn/406XR](http://parker.com/emn/406XR) to create a complete part number for the desired 404XR with motor mounting to a 3rd party motor. For more details on how to use the online configurator, see "How to Order the Right Motor Mount" in this product catalog.

⑪ Encoder Option

- E1 No Encoder
- E2 1.0 µm Resolution Linear Encoder (tape scale)
- E3 0.5 µm Resolution Linear Encoder (tape scale)
- E4 0.1 µm Resolution Linear Encoder (tape scale)
- E5 Rotary Shaft Encoder (not available with brake)

⑫ Brake Option

- B1 No Brake
- B2 Shaft Brake (Refer to 406XR holding torque specifications to confirm maximum load. Not available with rotary encoder)

⑬ Cleanroom Preparation

- R1 Standard Environment
- R2 Class 10 Compatible (consult factory)
- R5 Standard Environment with Easy Lube System †

⑭ Pinning Option *

- P1 No multi-axis pinning
- P2*** X axis transfer pinning to Y or Z axis - 30 arc-sec **
- P3*** Y axis transfer pinning to X axis - 30 arc-sec
- P4*** Z axis transfer pinning to X axis - 30 arc-sec

†Please consult factory if selecting option R5.

* Pinning option is for pinning to other 404XR and 406XR tables. Transfer pinning is not available on some XR to LXR models. Contact factory for more information. Pinning XY orientation standard with Y motor at 3 o'clock position.

** Z pinning uses bracket (see figures 7, 8 and 9 in "400XR Multi Axis Configurations")

***Consult factory for multi-axis pinning options and quotation

Free sizing and selection support
from Virtual Engineer at
virtualengineer.com



412XR

Fill in an order code from each of the numbered fields to create a complete model order code.

① ② ③ ④ ⑤ ⑥ ⑦ ⑧ ⑨ ⑩ ⑪ ⑫ ⑬ ⑭

Order Example:	412	T03	XR	M	S -	D2	H3	L3	C15	M4	E3	B1	R1	P1
-----------------------	-----	-----	----	---	-----	----	----	----	-----	----	----	----	----	----

① **Series**

412

② **Travel - mm**

T01	150
T02	250
T03	350
T04	650
T05	800
T06	1000
T07	1200
T08	1500
T09	1750
T10	2000

③ **Model**

XR Linear Table

④ **Mounting**

M Metric

⑤ **Grade**

S Standard

⑥ **Drive Screw**

D1	Free Travel
D2	5 mm Leadscrew
D3	10 mm Leadscrew
D5	25 mm Leadscrew
D6	32 mm Leadscrew

⑦ **Home Sensor ***

H1	None
H2	N.C. Current Sinking Flying Leads
H3	N.O. Current Sinking Flying Leads
H4	N.C. Current Sourcing Flying Leads
H5	N.O. Current Sourcing Flying Leads

* Includes a 3 meter extension cable with flying lead termination. A 7.5 meter extension cable can be ordered separately.

⑧ **Travel Limit Sensor ***

L1	None
L2	N.C. Current Sinking Flying Leads
L3	N.O. Current Sinking Flying Leads
L4	N.C. Current Sourcing Flying Leads
L5	N.O. Current Sourcing Flying Leads

* Includes a 3 meter extension cable with flying lead termination. A 7.5 meter extension cable can be ordered separately.

⑨ **Motor Coupling**

C1	No Coupling
C4	0.375" Oldham
C5	0.375" Bellows
C6	11 mm Oldham
C7	11 mm Bellows
C8	0.500" Oldham
C9	0.500" Bellows
C10	14 mm Oldham
C11	14 mm Bellows
C12	16 mm Oldham
C13	16 mm Bellows
C14	0.750" (19 mm) Oldham
C15	0.750" (19 mm) Bellows

Fill in an order code from each of the numbered fields to create a complete model order code.

⑩ Motor Mount

- M1** No Motor Mount
- M4** NEMA 34 In-Line Mounting
- M14** NEMA 34 Parallel Mounting, "A" Location
- M15** NEMA 34 Parallel Mounting, "B" Location
- M17** Neometric 34 In-Line Mounting
- M18** Neometric 34 Parallel Mounting, "A" Location
- M19** Neometric 34 Parallel Mounting, "B" Location
- M21** Neometric 70 In-Line Mounting
- M22** Neometric 70 Parallel Mounting, "A" Location
- M23** Neometric 70 Parallel Mounting, "B" Location
- M29** Neometric 92 In-Line Mounting
- M30** Neometric 92 Parallel Mounting, "A" Location
- M31** Neometric 92 Parallel Mounting, "B" Location
- M33** M105 & SMN100 In-Line Mounting
- M90** MPP092 In-Line Mounting
- M91** MPP092 Parallel Mounting, "A" Location
- M92** MPP092 Parallel Mounting, "B" Location
- M93** MPP092 Parallel Mounting, "C" Location

⑪ Encoder Option

- E1** No Encoder
- E2** 1.0 μ m Resolution Linear Encoder (tape scale)
- E3** 0.5 μ m Resolution Linear Encoder (tape scale)
- E4** 0.1 μ m Resolution Linear Encoder (tape scale)
- E5** 5.0 μ m Resolution Linear Encoder (tape scale)
- E6** Rotary Shaft Encoder (not available with brake)
- E7** Sine Encoder

⑫ Brake Option

- B1** No Brake
- B2** Shaft Brake (Refer to 412XR holding torque specifications to confirm maximum load. Not available with rotary encoder)

⑬ Cleanroom Preparation

- R1** Class 1000 with Strip Seals
- R2** Class 100 without Strip Seals

⑭ Pinning Option *

- P1** No multi-axis pinning
- P2***** X axis transfer pinning to Y or Z axis - 30 arc-sec **
- P3***** Y axis transfer pinning to X axis - 30 arc-sec (includes a required 15 mm thick adapter)
- P4***** Z axis transfer pinning to X axis - 30 arc-sec

* Pinning option is for pinning to other 404XR and 406XR tables. Transfer pinning is not available on some XR to LXR models. Contact factory for more information. Pinning XY orientation standard with Y motor at 3 o'clock position.

** Z pinning uses bracket (see figures 7, 8 and 9 in "400XR Multi Axis Configurations")

***Consult factory for multi-axis pinning options and quotation